

LEDVANCE.COM.AU



LEDVANCE

LEDVANCE Pty Ltd  
Unit 3, 83 Derby St  
Silverwater NSW 2128  
Customer Service  
Phone: 1300 467 726  
E-mail: sales.au@ledvance.com

# EZLITE CANOPY



VERSION 11/04/25

# EZLITE CANOPY

Introducing the EzLite Canopy, a robust lighting solution available in multi-watt options of 150W, 120W, 100W, and 75W. This heavy-duty fixture features an elegant design and tri colour temperature options of 3000K, 4000K, and 5000K, providing versatility for various applications. Engineered for durability, the EzLite Canopy is IP66 and IK08 rated, ensuring reliable performance in demanding environments. Its innovative design allows for very fast and easy recessed installation below the ceiling, making it an ideal choice for both new installations and retrofits.



White



Black

## FEATURES AND BENEFITS


- Multi-watt selectable: 150/120/100/75W
- Tri colour selectable: 3000K/4000K/5000K
- Clever mechanic design enables easy and quick recessed installation from below the ceiling
- High efficacy up to 160 lm/W, ensuring optimal brightness while maximizing energy efficiency
- Features durable construction with IP66 and IK08
- Includes optional DALI2.0 dimming and dimming sensor for advanced control

## AREAS OF APPLICATION

- Building entrances
- Gas station canopies
- Car parks



## AVAILABLE SIZES

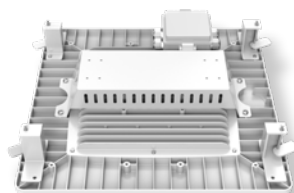

150/120/100/75W  
L 400mm x W 400mm x D 79mm

## ACCESSORIES (SOLD SEPARATELY)



White



Black


Surface Mount Frame

## SPECIFICATIONS


|                                  |                             |                              |                                                                  |
|----------------------------------|-----------------------------|------------------------------|------------------------------------------------------------------|
| <b>lm/W</b>                      | 150-160 lm/W                | <b>Connection Type</b>       | 1.5m flex & plug                                                 |
| <b>CCT</b>                       | 3000K/4000K/5000K           | <b>Voltage</b>               | 100-277V AC                                                      |
| <b>IP Rating</b>                 | IP66                        | <b>Input Current</b>         | 415mA                                                            |
| <b>IK Rating</b>                 | IK08                        | <b>PF</b>                    | 0.9                                                              |
| <b>Dimmable</b>                  | DALI2.0 (Optional)          | <b>Frequency</b>             | 50/60Hz                                                          |
| <b>Sensor</b>                    | Microwave sensor (Optional) | <b>Surge Protection</b>      | L-N> 4000V,<br>L,N-G>4000V                                       |
| <b>Housing Material</b>          | Die-cast aluminium          | <b>Flicker Rate</b>          | Flicker Free                                                     |
| <b>Diffuser</b>                  | Tempered Glass              | <b>Mounting Type</b>         | Recessed mounting (Standard)<br>Surface mounting Kits (Optional) |
| <b>Beam Angle</b>                | 120°                        | <b>Operating Temperature</b> | -30 ~ +50°C                                                      |
| <b>CRI</b>                       | >80                         | <b>Lifetime</b>              | 50000 hrs                                                        |
| <b>SDCM</b>                      | < 5                         | <b>Warranty</b>              | 5 years                                                          |
| <b>Electrical Classification</b> | Class I                     |                              |                                                                  |

## PHOTOMETRICS

(Example of LCP150MWWH)

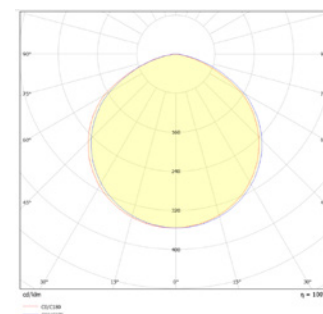

## DIMENSIONS

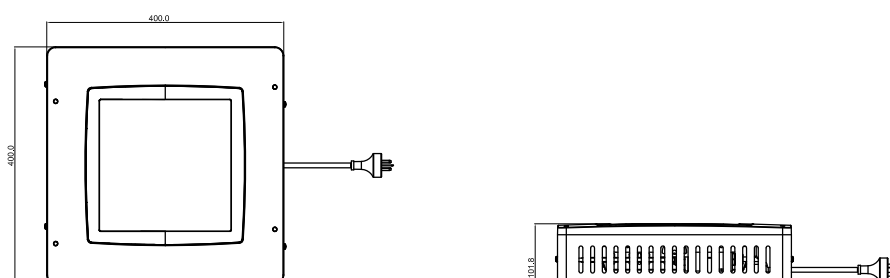

150/120/100/75W  
Recessed mounting: L 400mm x W 400mm x D 79mm  
With Surface Mounting Frame: L 400mm x W 400mm x D 102mm

## ORDERING CODES - EZLITE CANOPY

| Model number*<br>(Order Code) | EAN10         | Description                                                                                                           | W                          | lm <sup>1</sup>                     | K                      |  |  |  |  |  |
|-------------------------------|---------------|-----------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------------|------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>WHITE</b>                  |               |                                                                                                                       |                            |                                     |                        |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| LCP150MWWH                    | 4099854523854 | EZLITE CANOPY TC MW 150/120/100/75W<br>UPTO 160LM/W 24000LM IP66 IK08<br>3K/4K/5K FAST RECESSED INSTALLATION<br>WHITE | 150/<br>120/<br>100/<br>75 | 24000/<br>19200/<br>16000/<br>12000 | 3000/<br>4000/<br>5000 | 120                                                                                 | 160                                                                                 | 400                                                                                 | 400                                                                                 | 79                                                                                  |
| <b>BLACK</b>                  |               |                                                                                                                       |                            |                                     |                        |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| LCP150MWBK                    | 4099854523861 | EZLITE CANOPY TC MW 150/120/100/75W<br>UPTO 160LM/W 24000LM IP66 IK08<br>3K/4K/5K FAST RECESSED INSTALLATION<br>BLACK | 150/<br>120/<br>100/<br>75 | 24000/<br>19200/<br>16000/<br>12000 | 3000/<br>4000/<br>5000 | 120                                                                                 | 160                                                                                 | 400                                                                                 | 400                                                                                 | 79                                                                                  |
| <b>SURFACE MOUNT FRAME</b>    |               |                                                                                                                       |                            |                                     |                        |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| LCPSMFWH                      | 4099854581304 | EZLITE CANOPY SURFACE MOUNT FRAME<br>WHITE                                                                            |                            |                                     |                        |                                                                                     |                                                                                     | 400                                                                                 | 100                                                                                 | 83                                                                                  |
| LCPSMFBK                      | 4099854581311 | EZLITE CANOPY SURFACE MOUNT FRAME<br>BLACK                                                                            |                            |                                     |                        |                                                                                     |                                                                                     | 400                                                                                 | 100                                                                                 | 83                                                                                  |

\*Denotes of Model Number: L-LEDVANCE; CP-Canopy; 150MW-Multi Watt Up to 150W; SMF-Surface Mount Frame; WH-White; BK-Black

<sup>1</sup> The rated lumen outputs are specified @4000K/5000K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.