

LEDVANCE.COM.AU



LEDVANCE

LEDVANCE Pty Ltd
Unit 3, 83 Derby St
Silverwater NSW 2128
Customer Service
Phone: 1300 467 726
E-mail: sales.au@ledvance.com

WALLPACK WALL LIGHT



VERSION 09/05/25

WALLPACK WALL LIGHT

The WallPack Wall Light offers tri-colour and multi-watt options for precise control over colour temperature and brightness. With high efficacy up to 140 lm/W, it delivers powerful, efficient illumination. Built with a die-cast aluminium body and glass lens, it ensures long-lasting durability. Its IP65 rating provides excellent resistance to dust and water, while IK08 impact protection adds toughness for demanding environments. An optional DALI dimming driver enhances control. The WallPack Wall Light is a compact, high-performance solution for reliable and versatile outdoor lighting.



FEATURES AND BENEFITS

- Multi-Watt selectable: 120W/100W/80W/60W
- Tri Colour selectable: 3000K/4000K/5000K
- High efficacy up to 140 lm/W, ensuring optimal brightness while maximizing energy efficiency
- A die-cast aluminium body and tempered glass lens ensure durability and long-term performance
- IP65 and IK08 for outstanding water and impact resistance
- Optional DALI2.0 dimming available for advanced lighting control
- Multiple cable entries from rear and side make the installation easier

AREAS OF APPLICATION

- Public spaces
- Construction areas
- Car parks
- Commercial buildings



AVAILABLE SIZES




LWLWP120MW
120/100/80/60W
L 340mm x W 240mm x D 114mm

SPECIFICATIONS


lm/W	140 lm/W	Connection Type	PA16 Terminal
CCT	3000K/4000K/5000K	Voltage	220 - 240V AC
IP Rating	IP65	Input Current	540mA
IK Rating	IK08	Inrush Current	230V 55A@500μs
Dimmable	0~10V/DALI2.0 (Optional)	PF	0.9
Housing Material	Die-cast Aluminium	Frequency	50/60Hz
Diffuser	Tempered Glass	Flicker Rate	Flicker Free
Beam Angle	100°	Mounting Type	Wall mounting
CRI	>80	Operating Temperature	-30°C to +50°C
SDCM	≤5	Lifetime	50000 hours
Electrical Classification	Class I	Warranty	5 years

PHOTOMETRICS

(Example of LWLWP120MW)



DIMENSIONS

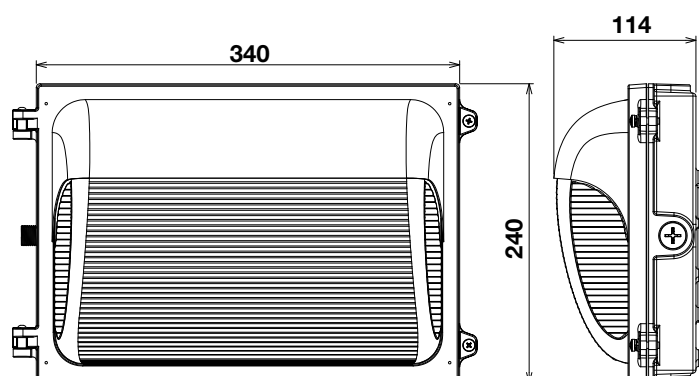

LWLWP120MW
120/100/80/60W
L 340mm x W 240mm x D 114mm

ORDERING CODES - WALLPACK WALL LIGHT

Model number* (Order Code)	EAN10	Description	W	lm ¹	K		lm/W			
-------------------------------	-------	-------------	---	-----------------	---	---	------	---	---	---

WALLPACK WALL LIGHT

LWLWP120MW	4099854523823	WALLPACK WALL LIGHT TC MW 120/100/80/60W UPTO 140LM/W 16800LM 3K/4K/5K IP65 IK08 L340*W240*H114MM BLACK	120/ 100/ 80/ 60	16800/ 14000/ 11200/ 8400	3000/ 4000/ 5000	100	140	340	240	114
------------	---------------	--	---------------------------	------------------------------------	------------------------	-----	-----	-----	-----	-----

*Denotes of Model Number: L-LEDVANCE; WLWP-Wall Light WallPack; 120MW-Multi Watt Up to 120W

1 The Rated Lumen outputs are specified @4000K/5000K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.