LEDVANCE.COM.AU




LEDVANCE Pty Ltd Unit 3, 83 Derby St Silverwater NSW 2128 Customer Service Phone: 1300 467 726

E-mail: sales.au@ledvance.com



INDYGLOW LOWBAY

The IndyGlow Lowbay offers multi-watt selectable settings of 240W, 200W, 160W, and 120W, providing flexibility for various industrial applications. It features flicker-free technology to enhance visual comfort and reduce eye strain. With a high CRI >90 and excellent colour uniformity (SDCM <3), it delivers outstanding light quality and accurate colour rendering. Built for durability, it boasts an IK10 impact rating and IP65 protection. Its high efficacy of 145 lm/W ensures maximum energy savings and lower operating costs.

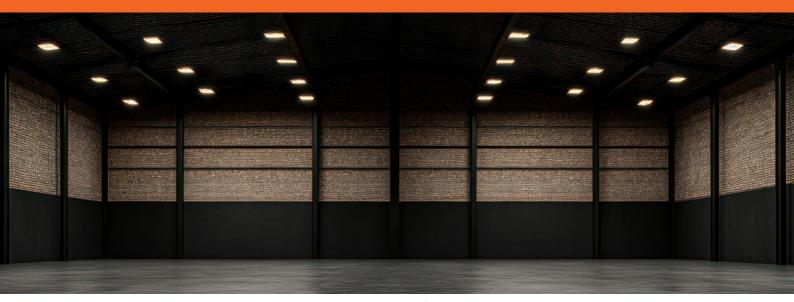



FEATURES AND BENEFITS

- Multi-watt selectable: 240/200/160/120W
- Flicker-free technology to ensure visual comfort in industrial environments
- High CRI >90 for enhanced colour accuracy and better visibility
- Excellent colour uniformity with SDCM <3 for consistent light quality
- Durable IK10 impact resistance and IP65 rating for tough industrial conditions
- High efficacy of 145 lm/W to maximise energy efficiency and reduce operating costs

















AREAS OF APPLICATION

- Warehouses
- Cool rooms
- Car parks
- Service station canopies
- Clean room
- Food preparation areas
- Manufacturing facilities

AVAILABLE SIZES





LLB240MW 240/200/160/120W L 600mm x W 600mm x H 138mm


SPECIFICATIONS

Multi Watt	240/200/160/120W					
lm/W	145 lm/W					
ССТ	4000K					
IP Rating	IP65					
IK Rating	IK10					
Dimmable	DALI2.0 optional					
Housing Material	Cold rolled sheet					
Diffuser	Polycarbonate					
Beam Angle	120°					
CRI	>90					
SDCM	≤3					
Electrical Classification	Class I					
Connection Type	PA16 Terminal					

Voltage	100-277V AC
Frequency	50/60Hz
Input Current	1100mA Max
Inrush Current	230V AC 80A@350µs
PF	>0.9
Surge Protection	L/N:6KV L/N-E:6KV
Flicker Rate	SVM<0.4, PST<1
Mounting Type	Surface mounting
Operating Temperature	-30°C to 50°C
Lifetime	50,000 hours
Warranty	5 years


PHOTOMETRICS

(Example of LLB240MW)



DIMENSIONS

Туре





LLB240MW 240/200/160/120W L 600mm x W 600mm x H 138mm

ORDERING CODES - INDYGLOW LOWBAY

Model number* (Order Code)	EAN10	Description	W	lm	K		lm/w	[mm]	W [mm]	h [mm]
LLB240MW	4099854523878	INDYGLOW LOWBAY MW 240/200/160/120W 4K 145LM/W UPTO 34800LM IK10 CRI90 3SDCM L600*W600*H138MM IP65 FLICKERFREE DIM10V	200/	34800/ 29000/ 23200/ 17400	4000	120	145	600	600	138

^{*}Denotes of Model Number: L-LEDVANCE; LB-LowBay; 240MW-Multi Watt Up To 240W