## **II CLIPSAL**



# Rotary adaptor, Clipsal Solis T Series, for wiser dimmer, brushed brass

40RWDA-BB

## Main

| Range                     | Clipsal Solis T Series |  |
|---------------------------|------------------------|--|
| Product or component type | Adaptor                |  |
| Outlet standard deviation | Australian/New Zealand |  |

## Complementary

| Device mounting        | Flush         |  |
|------------------------|---------------|--|
| Control type           | Rotary knob   |  |
| fixing mode            | Click-in      |  |
| Colour tint            | Brushed brass |  |
| Installation direction | Horizontal    |  |
| Surface finish         | Aluminium     |  |
| surface treatment      | Metallic      |  |
| Number Of Switches     | 1             |  |
| Material               | Aluminium     |  |
| Height                 | 51 mm         |  |
| Width                  | 22 mm         |  |
| Depth                  | 30 mm         |  |
| Product certifications | RCM           |  |

## **Environment**

| Ambient air temperature for operation | 045 °C |
|---------------------------------------|--------|
| Relative humidity                     | 1095 % |

## **Packing Units**

| Unit Type of Package 1       | PCE    |
|------------------------------|--------|
| Number of Units in Package 1 | 1      |
| Package 1 Height             | 3.5 cm |
| Package 1 Width              | 7.5 cm |
| Package 1 Length             | 7.5 cm |
| Package 1 Weight             | 47 g   |
| Unit Type of Package 2       | BB1    |
| Number of Units in Package 2 | 4      |

| Package 2 Height             | 15.5 cm  |
|------------------------------|----------|
| Package 2 Width              | 8 cm     |
| Package 2 Length             | 8 cm     |
| Package 2 Weight             | 266 g    |
| Unit Type of Package 3       | CAR      |
| Number of Units in Package 3 | 120      |
| Package 3 Height             | 34 cm    |
| Package 3 Width              | 36 cm    |
| Package 3 Length             | 48 cm    |
| Package 3 Weight             | 5.724 kg |



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

| ∅ Environmental footprint        |                               |
|----------------------------------|-------------------------------|
| Total lifecycle Carbon footprint | 11                            |
| Environmental Disclosure         | Product Environmental Profile |

### **Use Better**

| EU RoHS Directive   | Compliant                                 |
|---------------------|---|
| REACh Regulation    | REACh Declaration                         |
| Halogen-free status | Product contains halogen above thresholds |
| PVC free            | Yes                                       |


### **Use Again**


| ○ Repack and remanufacture      |                         |
|---------------------------------|-------------------------|
| End of life manual availability | End of Life Information |
| Take-back                       | No                      |

## 40RWDA-BB

Image of product / Alternate images

**Alternative** 

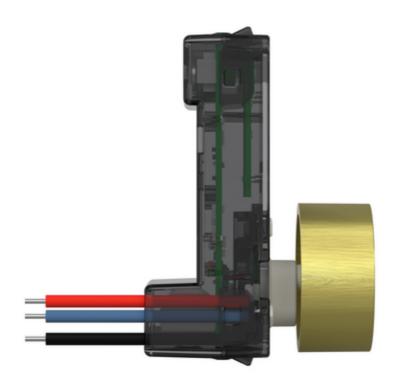


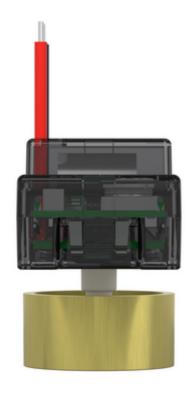

# 40RWDA-BB





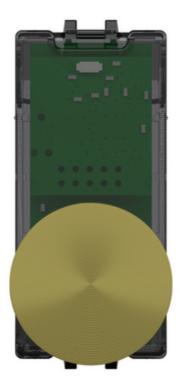



40RWDA-ВВ

