

Specification Sheet


Revision Date: 22/2/2012

Manufactures please note, we recommend that a sample is obtained to confirm suitability.
Specifications subject to change without notice. E&OE. © Altronic Distributors Pty. Ltd. ABN 84 177 396 871

Altronics Part Number	Description	Supplier Ordering Info
W 2192	Double insulated 24/0.20 Professional Speaker Cable	


Conductor

Outer Diameter 6.0mm
Material Bare Copper
AWG 0.75mm² x 2C (18AWG)
Construction 24/0.20mm
Stranded Diameter 1.31mm

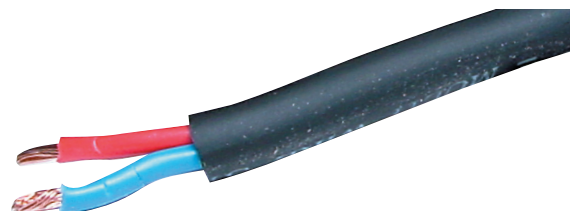

Insulation

Material PVC
Average Thickness 0.58mm
Insulation Diameter 23mm±0.1mm
Cores Assembly 4.6mm



Jacket

Material PVC
Average Thickness 0.95mm
Cable Diameter 6.5mm±0.1mm

Colour

Insulation Red, Blue
Jacket Black

Physical and electrical characteristics

Rated Voltage 240VAC @ 7.5A
Rated Temperature 75°C
Maximum DC Resistance 24.5Ω/km
Tensile Strength ≥10.3Mpa (insulation and jacket)
Elongation ≥65% upward (insulation)
Dielectric Strength 1kV/min (insulation in water)

Mechanical Characteristics

Aging Condition 113±1°C/168hr No crack
Heat Shock 121±2°C/1hr No crack
Cold Blend -20±2°C/4hr No crack

Packaging

Drum sizes 200m