



CONDUIT U CLIPS

PRODUCT DESCRIPTION:

PVC U clips designed for discreet conduit mounting where visible screws are undesirable or for side-by-side installations. The tongue-and-groove clip-on design allows secure attachment of multiple saddles. Suitable for mounting on walls, ceilings, metal or timber beams.

TECHNICAL DATA

Parameter	Value
Colour	Grey
Material	Polyvinyl Chloride (PVC)
Temperature Range	-5°C to 60°C
UV Resistance	Yes
Flame Retardant	Yes
BEP Certified	Yes

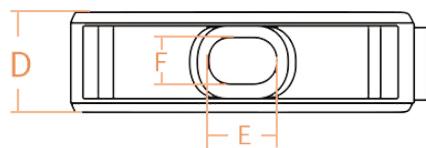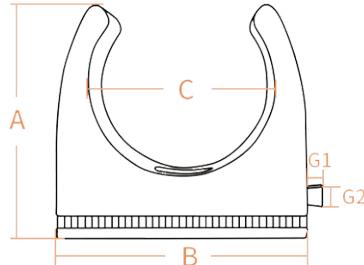

Part No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G1 (mm)	G2 (mm)
CLIP20-P	28	27	19.3	12	7.5	5.2	2.2	3.5
CLIP25-P	36	34	24.3	12	7.5	5.2	2.2	3.5
CLIP32-P	38	41	30.5	12	7.5	5.2	2.2	3.5

ORDERING INFORMATION

Part No.	Description	UOM	Qty Per
CLIP20-P	Conduit U Clip PVC 20mm Grey	BOX	100
CLIP25-P	Conduit U Clip PVC 25mm Grey	BOX	100
CLIP32-P	Conduit U Clip PVC 32mm Grey	BOX	50

APPLICATIONS

- Mounting conduits without visible fixings.
- Side-by-side conduit installations.
- Wall and ceiling installations.
- Mounting on metal beams.
- Mounting on timber beams.

In support of our policy of continuous product improvement, we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions provided are approximate. Where applicable, Safety Data Sheets (SDS) are made available on the website. All products should be installed and used in accordance with the manufacturer's instructions where provided, or otherwise in line with recognised industry best practice. Products may be the subject of registered designs and patents. Refer to the website for terms and conditions on warranty. To the maximum extent permitted by law, the manufacturer is not liable for damage resulting from misuse or reliance on this information. Some content on this datasheet may have been generated or enhanced using AI tools and has been reviewed by our technical team for accuracy and relevance.