

ROBUS®

DOWNLIGHTS

TAYLOR SLIM LED CCT4 SELECTABLE 7W, IP44



PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Polycarbonate/ ABS housing
- Polycarbonate opal diffuser
- Spring steel retaining clips with PVC covers
- Prewired with 0.6m flex and plug

FEATURES

- Low profile body available as flush and recessed trim versions
- Switch on the back of the fitting allows selection between 3000K, 4000K, 5000K and 6500K colour temperature
- Equipped with low flicker driver
- Offers IC-4 Thermal Insulation rating
- Complete with white trim. Black and brushed chrome trims available as accessories
- Dimming compatible with most TRIAC dimmers (compatibility list available on the website)



WARRANTY



LUMINAIRE
LIFETIME



LUMENS
PER W



IK RATING



IP RATING



OPERATING
VOLTAGE



BEAM ANGLE



DIMMING



CCT



SAFETY
CLASS

Product Code:	RC7SCCT4-01	RC7SRCCT4-01
Comparable to:	50W halogen	50W halogen
Total Power (W):	6.6	6.5
Power Factor:	0.9	0.9
Total Light Output (lm):	840	810
Total Emergency Light Output (lm):	NA	NA
Efficacy (lm/cctW):	127	125
Lux at 1m (lux):	300	310
Emergency Lux at 1m (lux):	NA	NA
CCT (K):	3000/4000/5000/6500	3000/4000/5000/6500
CRI:	80	80
SDCM:	6	6
UGR:	29.9	29.9
IP:	44	44
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	2A/35us	2A/35us
Rated Life to L70B50 (Hrs):	30000	30000
Dimensions ØxH (mm):	110x40	110x44.5
Cut out (mm):	92	92
Weight (kg):	0.19	0.19

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000

WEB: ROBUS.COM

UK: TEL: 0800 973 220

WEB: ROBUS.COM

AUS: TEL: +61 7 3890 5444

WEB: AU.ROBUS.COM

NZ:

WEB: NZ.ROBUS.COM

LED GROUP [EUROPE](#) · [UK](#) · [AUSTRALIA](#) · [NEW ZEALAND](#) · [ASIA](#) · [MIDDLE EAST](#) · [AFRICA](#)

TAYLOR SLIM LED CCT4 SELECTABLE

7W, IP44

Cone Illuminance Diagram

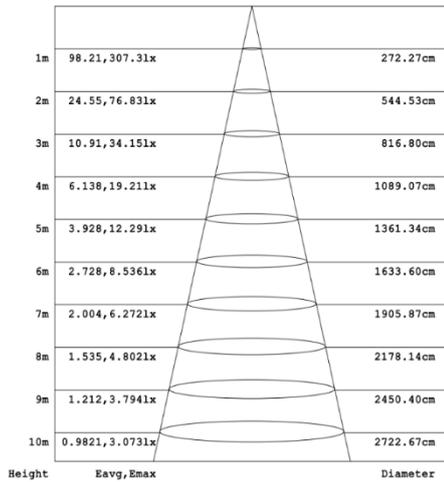


Diagram for RC7SCCT4-01 in 4000K. Other diagrams available on request

Polar Intensity Diagram




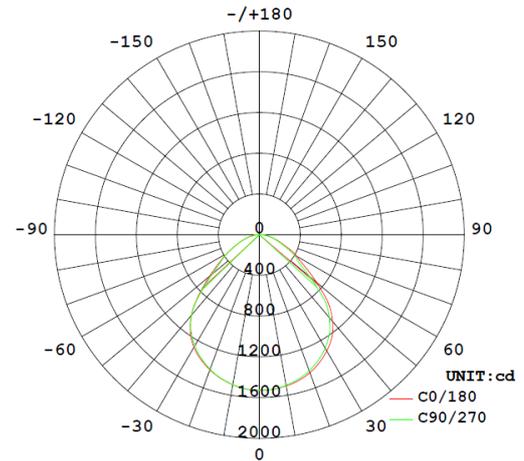


Diagram for RC7SCCT4-01 in 4000K. Other diagrams available on request



Dimension Diagram

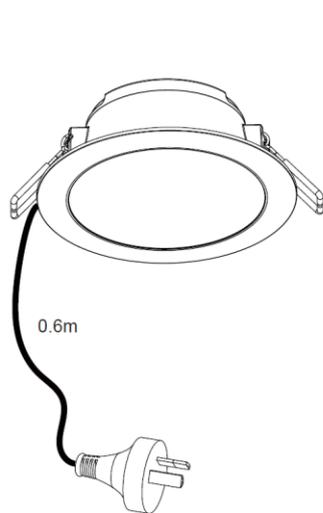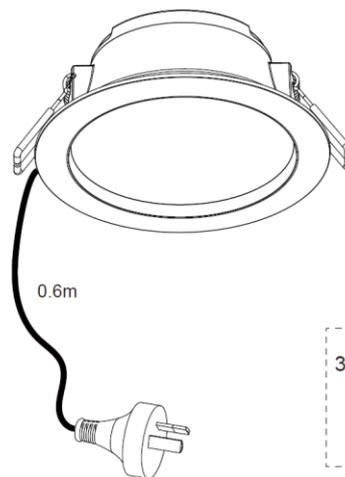

RC7SCCT4-01



RC7SRCCT4-01



Accessories

- RC7STRIM-04 Flush Trim, Black
- RC7STRIM-13 Brushed Chrome Trim

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ:

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: AU.ROBUS.COM
 WEB: NZ.ROBUS.COM

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA