

AT9075

Lumara Low Glare Downlight

- 8W LED COB delivering up to 760lm
- Available in white
- Tri-CCT selectable: 2700K / 3000K / 4000K
- High colour accuracy with CRI 90
- Low-glare design with UGR <19
- Slim, low-profile housing for shallow ceiling spaces
- Supplied with dimmable LED driver
- IP65 rated (front face only)
- Suitable for commercial, retail, showroom and feature lighting



ORDERING INFORMATION

Order code	12328
Description	Lumara - 8W 72mm Cutout Low Glare Downlight - CRI90 - White - TRI-CCT
Driver Type	Dimmable (Phase cut)
Item Code	AT9075/SML/WH/TRI

MECHANICAL

IP Rating	IP65 Front Face Only
IC Rating	IC-4
IC-4 rating has been conducted at the products maximum working Temperature Range (C) in line with Australian standards. This provides the required safety when covered with insulation and used in Australian Environments.	
IK Rating	IK06
Adjustability	Fixed
Fitting Colour	White
Product Finish	Powder Coated
Body Material	Diecast Aluminium
Installation Type	Recessed

ELECTRICAL

Input Frequency	50 Hz
Maximum Wattage	8 W
Input voltage	220-240

LAMP

Colour Rendering Index (CRI)	>90
LED Type	COB
UGR	<19
CCT Configuration	TRI-CCT
Maximum Bulb Wattage	8 W
Beam Angle	60 °

COLOUR TEMPERATURE

8 Watts

- 2700 K
- 3000 K
- 4000 K

DRIVER

Driver Type	Dimmable (Phase cut)
Driver Included	Yes
Integrated Driver	No
Dimmable	Yes
Flex & Plug or Lead Length	600 mm
Driver Mode	Constant Current
Flicker Free	Yes


DIMENSIONS

Product Height 47 mm


Product Diameter 80 mm

PHOTOMETRICS

AT9075/LUMARA/SML/WH/TRI/8W/2700K

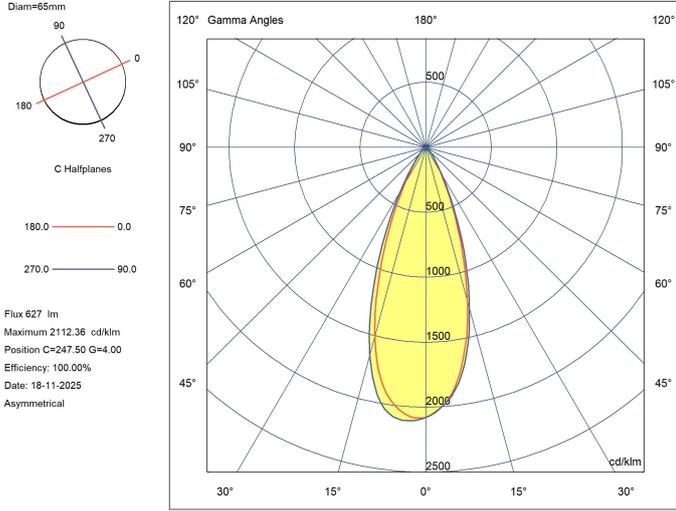

AT9075/LUMARA/SML/WH/TRI/8W/4000K

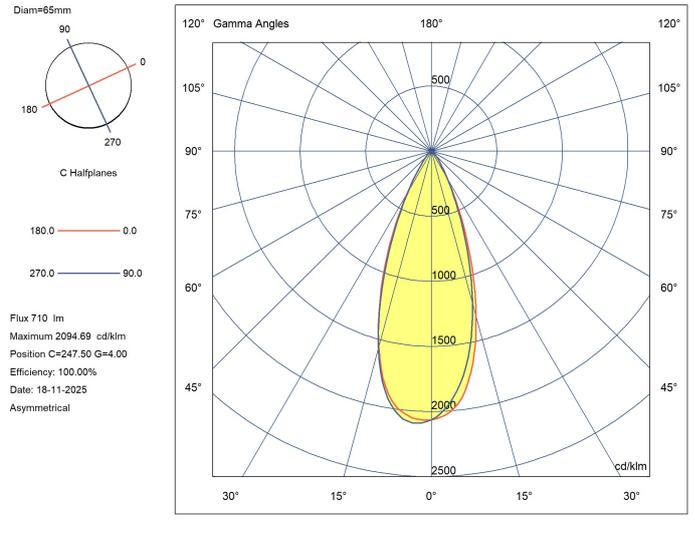

AT9075/LUMARA/SML/WH/TRI/8W/3000K

