

AT9075

Lumara Low Glare Downlight

- 12W LED COB delivering up to 1100lm
- Available in white, black and small versions
- Tri-CCT selectable: 2700K / 3000K / 4000K
- High colour accuracy with CRI 90
- Low-glare design with UGR <19
- Slim, low-profile housing for shallow ceiling spaces
- Supplied with dimmable LED driver
- IP65 rated (front face only)
- Suitable for commercial, retail, showroom and feature lighting



ORDERING INFORMATION

Order code	12330
Description	Lumara - 12W 90mm Cutout Low Glare Downlight - CRI90 - Black - TRI-CCT
Driver Type	Dimmable (Phase cut)
Item Code	AT9075/BK/TRI

MECHANICAL

IP Rating	IP65 Front Face Only
IC Rating	IC-4
IC-4 rating has been conducted at the products maximum working Temperature Range (C) in line with Australian standards. This provides the required safety when covered with insulation and used in Australian Environments.	
IK Rating	IK06
Adjustability	Fixed
Fitting Colour	Black
Body Material	Diecast Aluminium
Installation Type	Recessed

ELECTRICAL

Input Frequency	50 Hz
Maximum Wattage	12 W

LAMP

Colour Rendering Index (CRI)	>90
LED Type	COB
UGR	<19
CCT Configuration	TRI-CCT
Maximum Bulb Wattage	12 W
Beam Angle	60 °
Lamp/LED Current	270 mA

COLOUR TEMPERATURE

12 Watts

- 2700 K
- 3000 K
- 4000 K

DRIVER


Driver Type	Dimmable (Phase cut)
Driver Included	Yes
Integrated Driver	No
Dimmable	Yes
Flex & Plug or Lead Length	600 mm
Flicker Free	Yes

DIMENSIONS


Product Height	55 mm
Cutout	90 mm
Product Diameter	100 mm

PHOTOMETRICS

AT9075/LUMARA/BK/TRI/12W/2700K

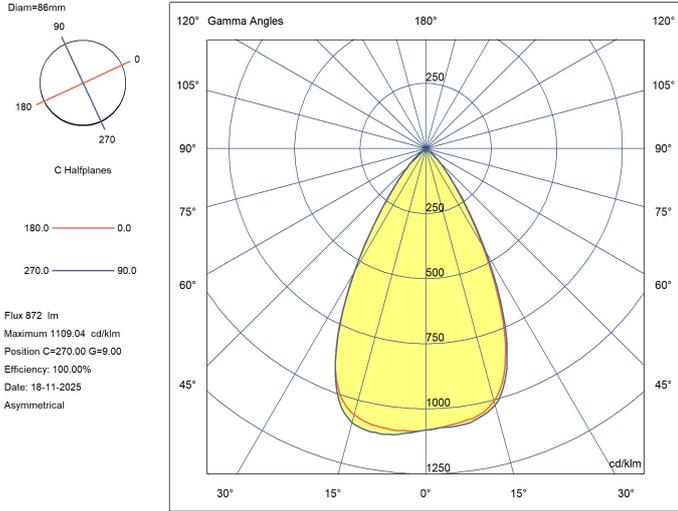

AT9075/LUMARA/BK/TRI/12W/4000K

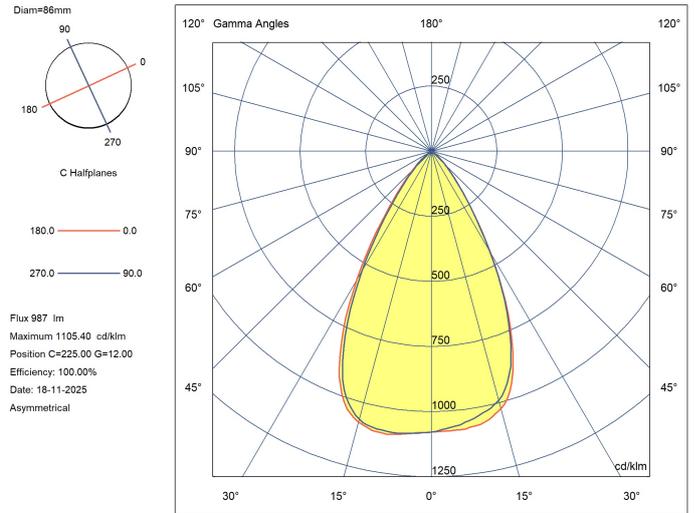

AT9075/LUMARA/BK/TRI/12W/3000K

