


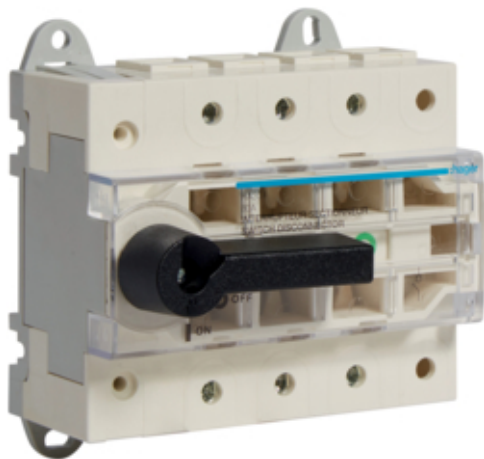

LOAD BREAK SWITCH 3P 80A

HA304

Technical Properties

Number of modules	6
Number of poles	3 P
Rated operational voltage Ue	380/415 V
Rated current	80 A
Cut off current	10 kA
Power loss per pole at I _n	2 W
Total power loss under I _N	6,1 W
Frequency	50 Hz
Rated insulation voltage	800 V
Rated impulse withstand voltage	8000 V
Fixation type	DIN rail mounting or back plate mounting
Connection cross-sect. rigid cable	50mm ² max.
Width of installed product	108 mm