


LUTC2001

current transformer - for TeSys U - 200/1 A

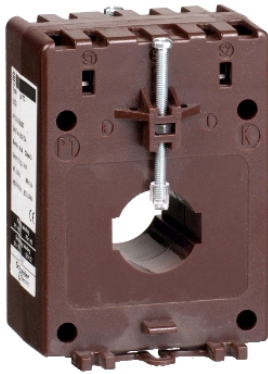

Main

Range	TeSys
Device short name	LUT
Product or component type	Current transformer

Complementary

Primary operational current	200 A
Secondary current	1 A
Opening height	55 mm
Opening width	32 mm
Width	94 mm
Height	99 mm
Depth	40 mm
Product weight	0.59 kg

Environment

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.