00162470017077

Altivar - Lexium EMC filters
VW3A31401...410

VW3A31401...409





VW3A31410

⚠⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Only appropriately trained persons who are familiar with and fully understand the contents of the present manual and all other pertinent product documentation and who have received all necessary training to recognize and avoid hazards involved are authorized to work on and with this equipment.
- Installation, adjustment, repair and maintenance must be performed by qualified personnel.
- Verify compliance with all local and national electrical code requirements as well as all other applicable regulations with respect to grounding of all equipment.
- Before performing work and/or applying voltage on the equipment, follow the instructions given in the appropriate installation manual.

Failure to follow these instructions will result in death or serious injury.

⚠ CAUTION

SHARP EDGES

Use all necessary personal protective equipment (PPE) such as gloves when performing any type of work whatsoever on or with this product.

Failure to follow these instructions can result in injury or equipment damage.

Electrical equipment should be installed, operated, serviced, and maintained only by qualifed personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this product.

© 2024 Schneider Electric. All Rights Reserved.

UK CA

MANUFACTURER
Schneider Electric Industries SAS
35 rue Joseph Monier
Rueil Malmaison 92500 France

UK REPRESENTATIVE
Schneider Electric Limited
Stafford Park 5
Telford, TF3 3BL United Kingdom

EAC

Опция для продуктов Altivar и Altistart. Пожалуйста, обратитесь к сообщению о преобразователе частоты EAC / программном сартере в приложении к началу работы,размещенном на веб-сайте производителя. Авторизованный поставщик в Республике Казахстан:
ТОО «Шнейдер Электрик»
Адрес: 050010, РК, г. Алматы, пр. Достык, 38, бизнес-центр «Кен Дала», 5 этаж, левое крыло.
Тел.: +7 (727) 339 23 57
Номер службы поддержки клиентов:
Тел.: +7 (727) 339 24 52

Altivar және Altistart өніміне арналған опция. Өндірушінің веб-сайтында орналастырылған «Жұмысқа кірісу» қосымшасындағы EAC жиілік инвертер / бірқалыпты іске қосу құрылғысы хабарламасына сілтеме жасауыңызды сұраймыз.
Қазақстан Республикасындағы уәкілетті жеткізуші:
ЖШС «Шнейдер Электрик»
Мекен-жайы: 050010, ҚР, Алматы қаласы, Достық даңғылы, 38, «Кең дала» бизнес орталығы, 5-қабат, сол қанат.
тел.: +7 (727) 339 23 57
Клиенттерге қызмет көрсету нөмірі:
тел.: +7 (727) 339 24 52

Schneider Electric

VW3A31401	9 A	ATV320U04M2C...U07M2C ATV31●●018M2, 037M2, 055M2, 075M2 LXM05●D10F1, D10M2
VW3A31402	7 A	ATV320U02M3C...U07M3C ATV31●018M3●, 037M3●, 055M3●, 075M3● LXM05●D10M3X
VW3A31403	16 A	ATV320U11M2C...U15M2C ATV31●●U11M2, U15M2 LXM05●D17F1, D17M2
VW3A31404	15 A	ATV320U04N4C...U15N4C ATV320U11M3C...U22M3C ATV320U04N4W●...U15N4W● ATV31●HU11M3●, U15M3●, U22M3● ATV31●●037N4, 055N4, 075N4, U11N4, U15N4 LXM05●D17M3X, D14N4 ATV21●H075M3X, HU15M3X, HU22M3X ATV21●H075N4, HU15N4, HU22N4
VW3A31405	22 A	ATV31●●U22M2 LXM05●D28F1, D28M2
VW3A31406	25 A	ATV320U22N4C...U40N4C ATV320U22N4W●...U40N4W● ATV320U30M3C...U40M3C ATV31●HU30M3●, U40M3● ATV31●●U22N4...U40N4 LXM05●D42M3X, D34N4 ATV21●HU30M3X, HU40M3X ATV21●HU30N4...55N4
VW3A31407	47 A	ATV320U55M3C...U75M3C ATV31●HU55M3X, U75M3X ATV31●●U55N4, U75N4 LXM05●D57N4 ATV21●HU55M3X, HU75M3X ATV21●HU75N4, HD11N4
VW3A31408	83 A	ATV320D11M3C...D15M3C ATV31●HD11M3●, D15M3● ATV21●HD11M3X...D18M3X
VW3A31409	49 A	ATV31●●D11N4, D15N4 ATV21●HD15N4, D18N4 ATV212HD22N4S
VW3A31410	70 A	ATV320D18N4C...D22N4C

VW3A31401...09

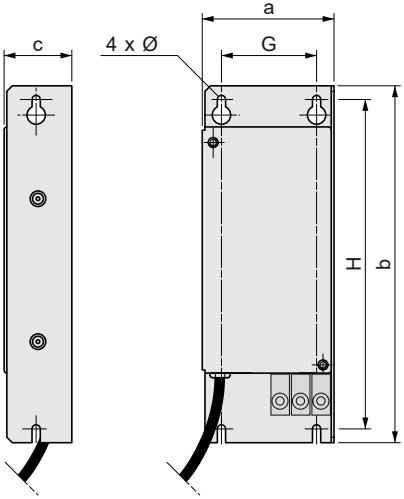

	a		b		c		G		H		Ø	
	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)
VW3A31401	72	2.82	195	7.63	37	1.45	52	2.04	180	7.05	4.5	0.18
VW3A31402	72	2.82	195	7.63	37	1.45	52	2.04	180	7.05	4.5	0.18
VW3A31403	107	4.2	195	7.63	35	1.37	85	3.32	180	7.05	4.5	0.18
VW3A31404	107	4.2	195	7.63	42	1.65	85	3.32	180	7.05	4.5	0.18
VW3A31405	140	5.48	235	9.2	35	1.37	120	4.7	215	8.42	4.5	0.18
VW3A31406	140	5.48	235	9.2	50	1.96	120	4.7	215	8.42	4.5	0.18
VW3A31407	180	7.05	305	11.94	60	2.35	140	5.48	285	11.15	5.5	0.22
VW3A31408	245	9.59	395	15.46	80	3.14	205	8.03	375	14.7	5.5	0.22
VW3A31409	245	9.59	395	15.46	60	2.35	205	8.03	375	14.7	5.5	0.22

VW3A31401, VW3A31405

	B	
	N.m	lbf.in
VW3A31401	1.8	16
VW3A31405		

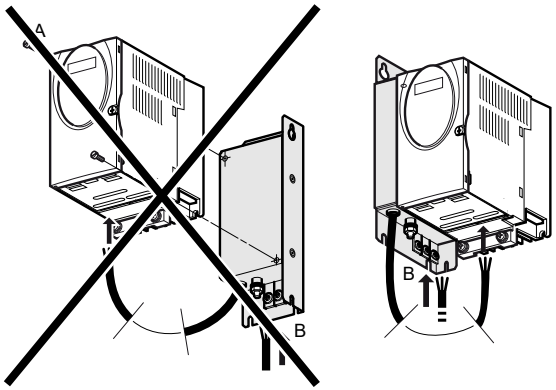

VW3A31402...04, VW3A31406...09

	A		B	
	N.m	lbf.in	N.m	lbf.in
VW3A31402...04 VW3A31406	1.5	13.3	1.8	16
VW3A31407	1.5	13.3	4.5	39.8
VW3A31408, 09	2.5	22.1	4.5	39.8

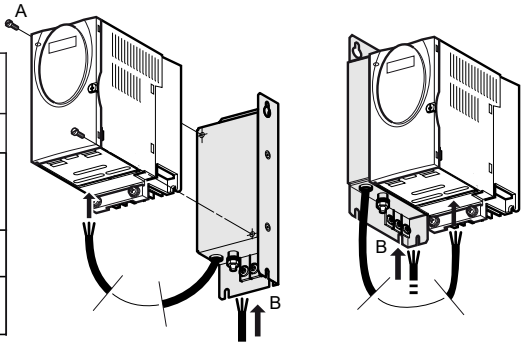

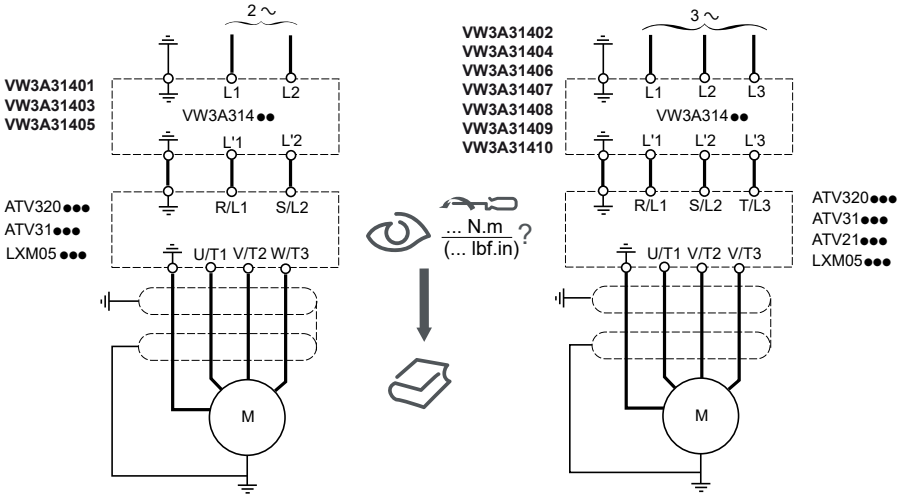

VW3A31410

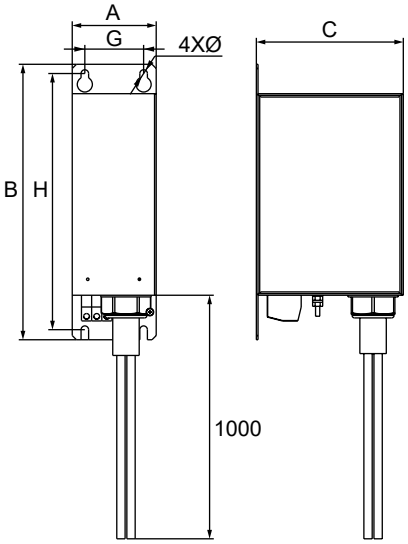
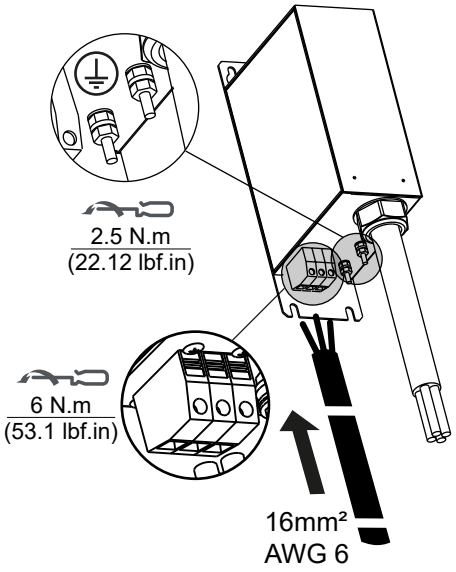
A		B		C		G		H		Ø	
mm	(inch)	mm	(inch)	mm	(inch)	mm	(inch)	mm	(inch)	mm	(inch)
120	4.72	328	12.91	175	6.89	90	3.54	305	12.13	9	0.35