

# Data Sheet

## 360° PIR Movement Sensor

CAT NO. **630R02WE**



A brand of **legrand**



<b>Cat No.</b>	<b>630R02WE</b>
<b>Description</b>	360° PIR Movement Sensor
<b>Input voltage</b>	230-240V a.c. 50Hz
<b>Detection range</b>	Ø8m
<b>Detection angle</b>	360°
<b>Manual override</b>	No
<b>Time delay</b>	10s to 10min (approx.)
<b>Max lighting load</b>	1000W Resistive charge 250W Fluo/LEDs
<b>Adjustable lux sensitivity</b>	Daylight to dark
<b>Colour finish</b>	White
<b>Operating temperature</b>	-5°C/+45°C
<b>Recommended mounting height</b>	> 2m ceiling amount
<b>Cut-out size</b>	Ø65mm
<b>Fascia size</b>	Ø78mm
<b>Warranty</b>	3 years

# 360° PIR Movement Sensor

CAT NO. **630R02WE**




A brand of **legrand**



Single product			
Cat No.	Dimensions (HxWxD)	Weight	Single Barcode
630R02WE	112x97x87mm	0.125kg	9321001456803

Outer box (Qty 24)			
Cat No.	Dimensions (HxWxD)	Weight	Single Barcode
630R02WE	370x305x270mm	3.56kg	9321001456841

- Recessed mounting
- Quick and easy mounting
- Detection range Ø8m
- 360° detection angle
- Adjustable time-delay and lux level
- Energy saving lighting management solution
- Ideal for bathrooms, wardrobes, garages and hallways
- This product does not require a minimum load to operate
- 3-year warranty

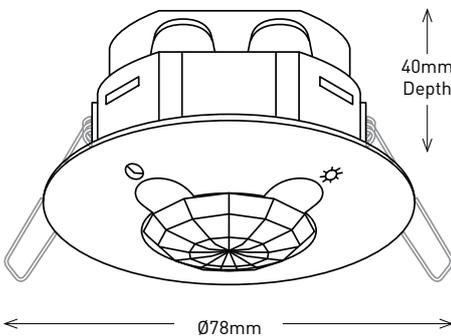

HPM Legrand - AUS  
1300 369 777  
[www.hpm.com.au](http://www.hpm.com.au)  
ABN 31 000 102 661

HPM Legrand - NZ  
0800 476 009  
[www.hpm.co.nz](http://www.hpm.co.nz)

Refer to your group buying office, HPM Legrand Sales Representative or HPM Legrand Sales Office for pricing.