## SIEMENS

## Data sheet

## 3SE5322-0SF21



Safety position switch with tumbler Locking force 1300 N 5 directions of approaches Spring-locked Escape release from the front Magnet voltage 24 V DC Monitoring actuator 2 NC/1 NO Monitoring magnet 2 NC/1 NO Supplied without actuator. Actuator 3SE5000-0AV0. please order separately

product brand name	SIRIUS				
product designation	Mechanical safety switches				
design of the product	with separate actuator and with tumbler				
product type designation	3SE5				
manufacturer's article number of the optional actuators	3SE5000-0AV01 standard actuator, 3SE5000-0AV02 actuator with vertical fixing, 3SE5000-0AV03 actuator with transverse fixing, 3SE5000-0AV04 radius actuator, approach from left, 3SE5000-0AV05 universal actuator, 3SE5000-0AV06 radius actuator, approach from right, 3SE5000-0AV07 Heavy Duty actuator, 3SE5000-0AW42 actuator with vertical fixing, stainless steel socket, 3SE5000-0AW43 actuator with transverse fixing, stainless steel socket, 3SE5000-0AW51 stainless steel actuator, 3SE5000-0AW52 stainless steel actuator with vertical fixing, 3SE5000-0AW53 stainless steel actuator with transverse fixing				
suitability for use safety switch	Yes				
General technical data					
product function positive opening	Yes				
locking force	1 300 N				
<ul> <li>according to EN ISO 14119</li> </ul>	1 000 N				
insulation voltage rated value	250 V				
degree of pollution	class 3				
surge voltage resistance rated value	4 kV				
protection class IP	IP65/IP67				
shock resistance	30g / 11 ms				
<ul> <li>according to IEC 60068-2-27</li> </ul>	30g / 11 ms				
vibration resistance	0.35 mm / 5g				
<ul> <li>according to IEC 60068-2-6</li> </ul>	0.35 mm/5g				
mechanical service life (operating cycles) typical	1 000 000				
thermal current	10 A				
material of the enclosure of the switch head	plastic				
reference code according to IEC 81346-2	В				
continuous current of the C characteristic MCB	1 A; for a short-circuit current smaller than 400 A				
continuous current of the quick DIAZED fuse link	10 A; for a short-circuit current smaller than 400 A				
continuous current of the DIAZED fuse link gG	6 A; for a short-circuit current smaller than 400 A				
repeat accuracy	0.05 mm				
Substance Prohibitance (Date)	10/01/2011				
SVHC substance name	Blei - 7439-92-1				
minimum actuating force in directions of actuation	30 N				
length of the sensor	185 mm				
width of the sensor	54 mm				
Ambient conditions					
ambient temperature					
• during operation	-25 +60 °C				
during storage	-40 +80 °C				

explosion protection category for dust			none				
consumed active power of magnet coil			3.5 W				
operational current at AC-15							
<ul> <li>at 24 V rated value</li> </ul>		6 A	A				
• at 120 V rated value			6 A				
<ul> <li>at 240 V rated value</li> </ul>	3 A						
operational current at DC-13							
<ul> <li>at 24 V rated value</li> </ul>		3 A	3 A				
• at 125 V rated value			0.55 A				
• at 250 V rated value			0.27 A				
Enclosure							
design of the housing		specia	al design				
material of the enclosure		plastic					
design of the housing according to standard		No					
Drive Head							
design of the actuating element		5 dire	ctions of appro	oach			
				Oach			
design of the switching function			positive opening				
number of directions of actuation		5					
circuit principle		slow-a	action contacts	S			
· · · ·	number of switching contacts safety-related						
cable entry type			3x (M20 x 1.5)				
locking mechanism design spring-actuated lock (closed-circuit principle) escape release from the fit						lease from the front	
Installation/ mounting/ dimensions							
mounting position			any				
fastening method			screw fixing				
Connections/ Terminals							
type of electrical connection		screw	-type terminal	ls			
type of connectable conductor cross-sections							
• solid		1x (0.5 1.5 mm²), 2x (0.5 0.75 mm²)					
<ul> <li>finely stranded with core end processing</li> </ul>		1x (0.5 1.5 mm²), 2x (0.5 0.75 mm²)					
• for AWG cables solid		1x (20 16), 2x (20 18)					
for AWG cables stranded			1x (20 16), 2x (20 18)				
Supply voltage							
supply voltage of magnet coil		24 V					
design of the interface for safety-related communic	ation						
Communication/ Protocol	ation	without					
			.4	_			
design of the interface		withou	Jt				
Safety related data				_			
· · · · · · · · · · · · · · · · · · ·	B10 value with high demand rate according to SN 31920			1 000 000			
proportion of dangerous failures with high demand according to SN 31920	rate	20 %					
Certificates/ approvals			_	_			
			_	_			
General Product Approval						Functional Safety/Safety of Ma- chinery	
	<u>Confirmatio</u>	<u>n</u>			EHC	<u>Type Examination Cer-</u> <u>tificate</u>	
Declaration of Conformity	Test Certificate	es	other		Dangerous Good		
UK CE CA CE EG-Konf.	<u>Type Test Cer</u> ates/Test Rep	<u>tific-</u> oort	<u>Confirm</u>	<u>ation</u>	Transport Information		
Further information Siemens has decided to exit the Russian marke	t (see here).						

Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

## Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5322-0SF21


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5322-0SF21

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3SE5322-0SF21

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SE5322-0SF21&lang=en

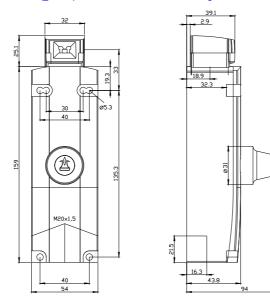

@30



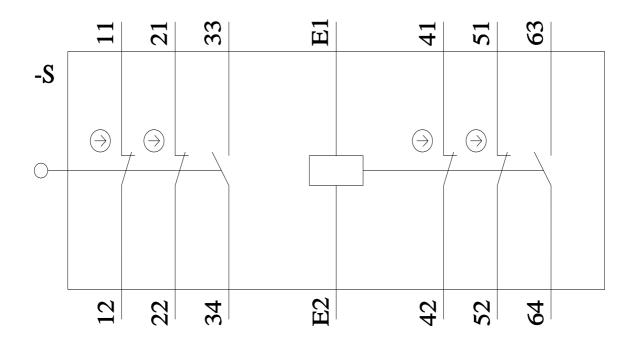

last modified:

9/5/2023 🖸