


Catalogue No: **XA63018U**

CHASSIS ASSY XA 630A 18 WAY

Power Distribution and Protection > Busbar, Chassis and Power Connections > Chassis > Chassis for Terasaki MCCBs
> TemWay XA XB PXB XC chassis > XA 630A 3 Pole Double Sided Chassis

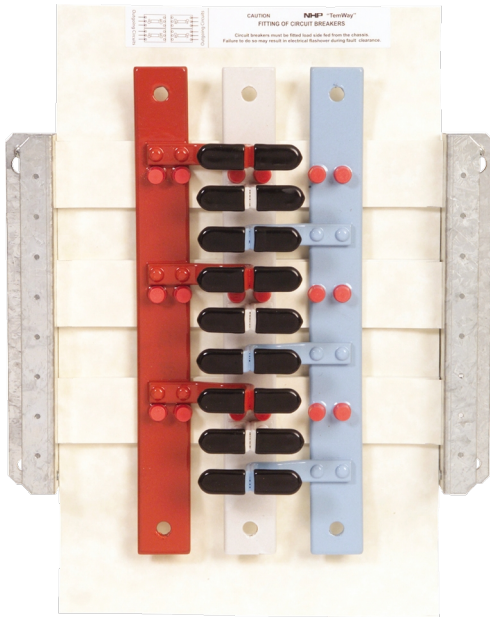

Representative Photo Only
(actual product may vary based on configuration selections)

XA Double Sided 630A 18 Way 3P Chassis

- Chassis busbar systems for mounting MCCBs from 12 to 1250A, covering power distribution and motor control applications
- Wide range of types include double and single sided MCCB mounting chassis, allowing chassis to mount in wide or narrow spaces
- Chassis types: XA, XB, XBSS, PXB, XC with main bars to 800A for 125/250A MCCBs, and HC 1250-2200A type for MCCBs to 1250A
- Different terminal cover options for line and load connection, allow configurations for separation Form ratings up to 4bih
- Large stock of complete chassis and subcomponents results in a short lead time for customers

SPECIFICATIONS

Product Series	XA
Chassis Type	Main Chassis
Compatible Product Series'	E125 S125 ZS125
In, Rated Current	630 A
Tee-Off Direction	Left / Right
Un, Nominal Operational Voltage, AC	690 V AC
Icw, Short Time Withstand Current, 500ms (rms)	40 kA, 500ms
Icw, short time withstand current, 1s (rms)	36 kA for 1s
Number of Poles	18
Output Phases	3P
Compatible Frame Size(s)	125 AF compatible
Height	470 mm
Height, Cutout	272 mm
Height, Pan	270 mm
Width, Pan	373.2 mm
Depth	110 mm
Standards Compliance	AS/NZS 3000:2007 AS/NZS 61439.1

Catalogue No: **XA63018U**
CHASSIS ASSY XA 630A 18 WAY

Power Distribution and Protection > Busbar, Chassis and Power Connections > Chassis > Chassis for Terasaki MCCBs
> TemWay XA XB PXB XC chassis > XA 630A 3 Pole Double Sided Chassis



REFERENCES

IECEX Certificate -

Supplier Declaration of
Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue
& Product Selection: -