PHILIPS Lighting



MASTER PL-C 2 Pin

MASTER PL-C 18W/840/2P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- \cdot Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


al Information		Luminous Flux (Rated) (Nom)	1200 lm
ap-Base	G24D-2 [G24d-2]	Color Designation	Cool White (CW)
ife To 10% Failures (Nom)	6500 h	Correlated Color Temperature (Nom)	4000 K
ife to 50% Failures (Nom)	10000 h	Luminous Efficacy (rated) (Nom)	67 lm/W
SF 2000 h Rated	99 %	Color Rendering Index (Nom)	82
SF 4000 h Rated	98 %	LLMF 2000 h Rated	92 %
LSF 6000 h Rated	92 %	LLMF 4000 h Rated	87 %
LSF 8000 h Rated	78 %	LLMF 6000 h Rated	83 %
		LLMF 8000 h Rated	81 %
Light Technical			
Color Code	840 [CCT of 4000K]	Operating and Electrical	
Luminous Flux (Nom)	1200 lm	Power (Nom)	17.9 W

MASTER PL-C 2 Pin

Lamp Current (Nom)	0.230 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	2 Pins
Approval and Application	
Energy Efficiency Label (EEL)	В
Mercury (Hg) Content (Nom)	1.4 mg

Energy Consumption kWh/1000 h	22 kWh		
Product Data			
Full product code	871150064272100		
Order product name	MASTER PL-C 18W/840/2P 1CT/5X10BOX		
EAN/UPC - Product	8711500642721		
Order code	927905784001		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	50		
Material Nr. (12NC)	927905784001		
Net Weight (Piece)	57.800 g		
ILCOS Code	FSQ-18/40/1B-I-G24d=2		

Dimensional drawing




MASTER PL-C 18W/840/2P 27.1 mm 27.1 mm 109.5 mm 128.0 mm 150.4 mm 1CT/5X10BOX


D (max) D1 (max) A (max) B (max) C (max)

PL-C 18W/840/2P

Photometric data

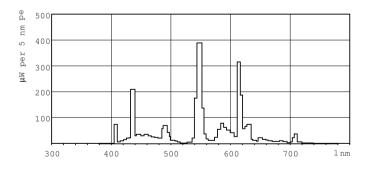

LDPB_PLC2P_840-Spectral power distribution B/W

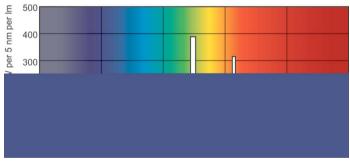


LDPO_PLC2P_840-Spectral power distribution Colour


Product

MASTER PL-C 2 Pin


Lifetime

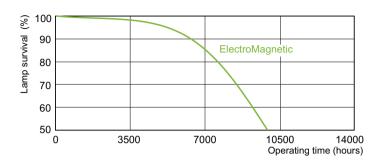



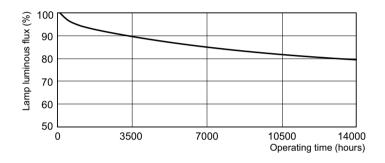

LDLM_PLC2P_0001-Lumen maintenance diagram



LDLE_PLC2P_0002-Life expectancy diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.