



INDUSTRIAL

HAZARDOUS  
AREAS

DATA ICT

RESIDENTIAL  
COMMERCIAL



## **B&R Enclosures AUSRACK IP**

[brenclosures.com.au](http://brenclosures.com.au)

# Ausrack IP


19" racking cabinets for harsh environments




- 19" cabinet system designed to protect sensitive equipment from harsh environments.
- Suitable for protecting equipment from dust and water.
- Designed to accommodate small to medium passive patching networks.
- Easy cabling via gland plate.
- Front or rear depth adjustable 19" rack rails.
- Manufactured from 1.6mm zinc coated steel or 1.5mm 316 stainless steel.

Comes standard with:

- Front and rear adjustable 19" rack rails
- Gland plate (fitted internally or externally)
- 7mm square turnbuckle lock (on units <1600mm high)
- Lockable L handles (1600mm high & above)
- 3-point locking
- Removable back
- Door rails
- Earth strap kit

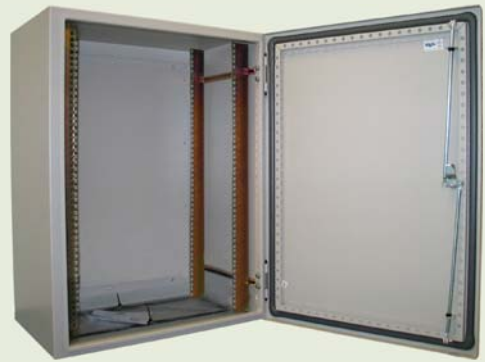

## TECHNICAL DRAWINGS

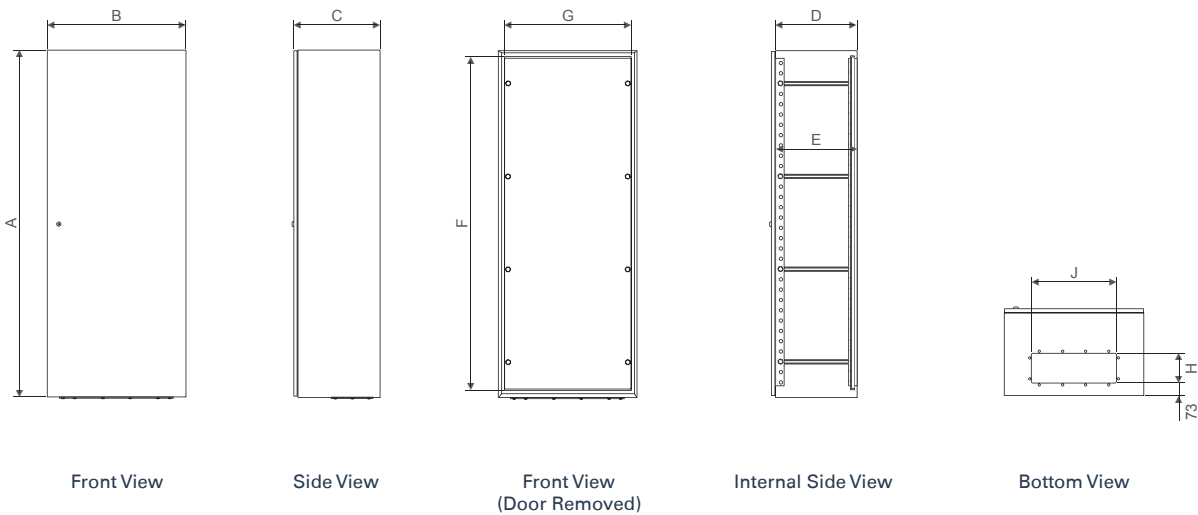

# Ausrack IP

19" racking cabinets for harsh environments



## ORDERING GUIDE

Product	Part Number	RU	Dimensions (mm)										Weight (kg)
			External				Internal	Opening Size		Gland Opening			
			Height (A)	Width (B)	Depth (C)	Usable Depth (D)	Depth (E)	Height (F)	Width (G)	Height (H)	Width (J)		
Zinc coated steel	ARIP11U64	11	600	600	400	360	380	540	540	170	490	33.0	
	ARIP15U64	15	800	600	400	360	380	740	540	170	490	39.9	
	ARIP15U65	15	800	600	500	460	480	740	540	170	490	44.9	
	ARIP15U66	15	800	600	600	560	580	740	540	170	490	50.0	
	ARIP24U64	24	1200	600	400	360	380	1140	540	170	490	56.0	
	ARIP24U65	24	1200	600	500	460	480	1140	540	170	490	62.0	
	ARIP24U66	24	1200	600	600	560	580	1140	540	170	490	74.0	
	ARIP32U66	32	1600	600	600	560	580	1540	540	170	490	84.0	
	ARIP38U65	38	1800	600	500	460	480	1740	540	170	490	94.5	
	ARIP42U65	42	2000	600	500	460	480	1940	540	170	490	95.5	
ARIP42U66	42	2000	600	600	560	580	1940	540	170	490	112.0		
316 Stainless Steel	ARIP11U64/S	11	600	600	400	360	380	540	540	170	490	33.0	
	ARIP15U64/S	15	800	600	400	360	380	740	540	170	490	35.0	
	ARIP15U65/S	15	800	600	500	460	480	740	540	170	490	42.0	
	ARIP15U66/S	15	800	600	600	560	580	740	540	170	490	47.0	
	ARIP24U64/S	24	1200	600	400	360	380	1140	540	170	490	53.0	
	ARIP24U65/S	24	1200	600	500	460	480	1140	540	170	490	57.5	
	ARIP24U66/S	24	1200	600	600	560	580	1140	540	170	490	70.0	
	ARIP32U66/S	32	1600	600	600	560	580	1540	540	170	490	79.0	
	ARIP38U65/S	38	1800	600	500	460	480	1740	540	170	490	88.5	
	ARIP42U65/S	42	2000	600	500	460	480	1940	540	170	490	89.5	
ARIP42U66/S	42	2000	600	600	560	580	1940	540	170	490	106.0		

## ACCESSORIES QUICK SELECTION

Accessories	Page No.
Rainhoods	4
External Vent Kits	4
Vent Hoods	4
Galvanised Channel Iron Plinths	4
Shelves	5
Horizontal Cable Management	5
Horizontal Power Rails	5
Fan Kits	5
Filters	6
Blanking Panels	6
Door Stay	6
Mounting Rails	6
Swing Frames	7
19" Mounting Rail	7
Plan Holder	7
Wall Mounting Brackets	8
Light Kit	8
Cage Nuts	8
Rack Studs	8
Locks	9

# Ausrack IP

## Accessories to suit Ausrack IP enclosures

### Rainhoods

Designed to shed water from the top of the enclosure and to prevent water from pooling on the enclosure top. They include an overhang of 14mm.

Part Number	Material	Dimensions (mm)																									
		Height	Width	Depth	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
IPRH214		30	600	414	•	•							•														
IPRH215	Powdercoated steel	30	600	514					•						•							•		•			
IPRH216		30	600	614							•														•		
IPRH214/S		30	600	414		•		•							•												
IPRH215/S	316 stainless steel	30	600	514							•												•		•		
IPRH216/S		30	600	614																						•	

### External Vent Kits

Ensures the enclosure does not become excessively hot by allowing natural circulation of air. The vent kit includes a gasket, insert filter and fittings. Please note that by the nature of this item, the enclosure will not be rated to IP66.

Part Number	Material	Dimensions (mm)			To suit cut-out (mm)																							
		Height	Width	Depth	Height	Width	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S
IPVK	Powdercoated steel	-	130	130	80	80	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
IPVK/S	316 stainless steel	-	130	130	80	80	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

### Vent Hoods

Designed to suit B&R's range of fans and filters and ensure that the fan is protected mechanically and to further protect from water and dust ingress.

Part Number	Material																							
		ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
IPVH12		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
IPVH25	Powdercoated steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
IPVH35						•																		
IPVH12/S		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
IPVH25/S	316 stainless steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
IPVH35/S					•	•																		



IPVH (powdercoated)




IPVH (stainless steel)

### Galvanised Channel Iron Plinths

Designed for use when mounting enclosures on the floor.

Part Number	Dimensions (mm)																									
	Height	Width	Depth	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
IPPC214	75	600	371	•	•	•	•					•	•													
IPPC215	75	600	471					•	•					•	•											
IPPC216	75	600	571							•	•														•	•



IPPC

# Ausrack IP

Accessories to suit Ausrack IP enclosures



## Shelves

Designed for mounting fixed equipment. Available in various options to suit your requirements.

Product	Part Number	Dimensions (mm)																								
		Width	Depth	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
Fixed	ARPFL600	450	450																							
Cantilever (10kg)	ARC350	450	360	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



AR350CS

## Horizontal Cable Management

A cable management solution for use in high density cabling applications.

Part Number	RU	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
ARPCMH1U	1	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



ARPCMH1U

## Horizontal Power Rails

A range of power rails for use inside cabinets for power distribution mounted horizontally. Available in 6-way and 10-way, 10Amp SAA outlets.

Part Number	Outlet	Input plug																						
			ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S
ARPRH61010	6 x 10A	10A SAA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
ARPRH61015	6 x 10A	15A SAA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
ARPRH101010	10 x 10A	10A SAA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
ARPRH101015	10 x 10A	15A SAA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



ARPRH61010

## Fan Kits

Can be installed into the roof or externally on the enclosure to provide added ventilation. Please note that by the nature of external fan kits, the enclosure will not be rated to IP66 if fitted.

Product	Description	Part Number																						
			ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S
Internal	2-unit	ARPAF2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Thermostat controlled	ARPAF2T	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
External	55m³/h	TX-FAN12BN0A	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	110m³/hr	TX-FAN23BN0A	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	230m³/h	TX-FAN25BN0A	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	550m³/h	TX-FAN35BN0A	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



ARPAF2T



TX-FAN12

# Ausrack IP

## Accessories to suit Ausrack IP enclosures

### Filters – IP44

Range of filters mounted to the outside of the enclosure and can be used in conjunction with any fans.

Part Number	Dimensions (mm)																									
	Height	Width	Depth	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
TX-FIL12XN0A	150	150	25	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
TX-FIL25XN0A	250	250	31	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
TX-FIL35XN0A	325	325	33					•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	

### Blanking Panels

Used to control airflow within the enclosure. They are manufactured from 1.2mm steel with a powdercoated matt black surface finish.

Part Number	RU																								
		ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S		
EBP1U	1	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
EBP2U	2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
EBP3U	3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
EBP4U	4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
EBP5U	5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
EBP6U	6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



IPDS



IPLRF



IPHRF

### Door Stay

Ensures the door remains open even in windy weather, for the safety of people working on the installed equipment.

Part Number	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S
IPDS	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

### Mounting Rails

To suit IP swing frames. These mount top and bottom off the horizontal C rail. One kit needed per swing frame.

Product	Part Number	Width (mm)																																								
			IP21214	IP21214/S	IP21294	IP21294/S	IP29214	IP29214/S	IP29215	IP29215/S	IP29216	IP29216/S	IP29294	IP29294/S	IP45214	IP45214/S	IP45215	IP45215/S	IP45216	IP45216/S	IP45294	IP45294/S	IP45295	IP45295/S	IP61216	IP61216/S	IP69215	IP69215/S	IP69295	IP69295/S	IP77215	IP77215/S	IP77216	IP77216/S	IP77295	IP77295/S	IP77296	IP77296/S				
Light-duty	IPLRF06	600	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	IPLRF08	800			•	•																																				
Heavy-duty	IPHRF06	600	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	IPHRF08	800			•	•																																				

# Ausrack IP

Accessories to suit Ausrack IP enclosures



## Swing Frames

Used to install 19" rack mounted equipment and provides access without having to remove the rear panel.

Product	Part Number	RU	IP21214	IP21214/S	IP21294	IP21294/S	IP29214	IP29214/S	IP29215	IP29215/S	IP29216	IP29216/S	IP29294	IP29294/S	IP45214	IP45214/S	IP45215	IP45215/S	IP45216	IP45216/S	IP45294	IP45294/S	IP45295	IP45295/S	IP61216	IP61216/S	IP69215	IP69215/S	IP69295	IP69295/S	IP77215	IP77215/S	IP77216	IP77216/S	IP77295	IP77295/S	IP77296	IP77296/S	
Light-duty	LQSF03RU <sup>▲</sup>	3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	LQSF06RU <sup>▲</sup>	6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	LQSF09RU <sup>▲</sup>	9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	LQSF12RU <sup>▲</sup>	12							•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	LQSF15RU <sup>▲</sup>	15														•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	LQSF18RU <sup>▲</sup>	18														•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Heavy-duty	LQSF22RU <sup>▲</sup>	22													•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	LQSF27RU <sup>▲</sup>	27																								•	•	•	•	•	•	•	•	•	•	•	•	•	•
	LQSF31RU <sup>▲</sup>	31																								•	•	•	•	•	•	•	•	•	•	•	•	•	•
	LQSF36RU <sup>▲</sup>	36																									•	•	•	•	•	•	•	•	•	•	•	•	•
	LQSF40RU <sup>▲</sup>	40																																					

▲ Available on request



Light-duty



Heavy-duty

## 19" Mounting Rails

Suitable for the installation of 19 inch mounted equipment

Part Number	Height (mm)	IP21214	IP21214/S	IP21294	IP21294/S	IP29214	IP29214/S	IP29215	IP29215/S	IP29216	IP29216/S	IP29294	IP29294/S	IP45214	IP45214/S	IP45215	IP45215/S	IP45216	IP45216/S	IP45294	IP45294/S	IP45295	IP45295/S	IP61216	IP61216/S	IP69215	IP69215/S	IP69295	IP69295/S	IP77215	IP77215/S	IP77216	IP77216/S	IP77295	IP77295/S	IP77296	IP77296/S			
UV19*	1946	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
IPRU11	536	•	•																																					
IPRU15	758					•	•	•	•	•	•																													
IPRU24	1158													•	•	•	•	•	•																					
IPRU32	1469																									•	•													
IPRU38	1736																											•	•											
IPRU42	1958																																							
IPRU11/800	536			•	•																																			
IPRU15/800	758											•	•																											
IPRU24/800	1158																									•	•	•	•											
IPRU32/800	1469																																							
IPRU38/800	1736																																							
IPRU42/800	1958																																							

\* Cut to size



IPRU

## Plan Holder

Designed to hold a standard A4 document to ensure that it is kept clean and conveniently placed. Typically this would hold detailed procedures, diagrams and more.

Part Number	Description	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
IPPLN	A4, plastic	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



IPPLN

# Ausrack IP

## Accessories to suit Ausrack IP enclosures

### Wall Mounting Brackets

For ease of installation and fixing to the mounting surface, mounting brackets ensure optimum installation and safety. Supplied in a set of 4.

Part Number	Product	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
IPWM	Zinc coated steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
IPWM/S	316 stainless steel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
IPWM/A	Aluminium (RAL7035)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

### Light Kit

For safety and to ensure easy installation and maintenance of equipment. The light kit comes complete with on-off switch, rail and fittings required for installation.

Part Number	Description	To suit width (mm)	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S
IPLTK06	Complete kit	600	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
BRLED500	LED 12V light, 500mm	-	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
IPLKB06*	Mounting kit	600	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

\* IPLKB06 required to mount BRLED product.

### Cage Nuts

An optional accessory available in a pack of 50.

Part Number	Description	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
ARCN	Pack of 50	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



Cage Nuts

### Rack Studs

Independently tested to over 156kgs/343lbs of shear strength, rack studs are a suitable replacement for the cage nut. Rackstuds are made from a metal replacement engineered plastic.

Part Number	Description	ARIP11U64	ARIP11U64/S	ARIP15U64	ARIP15U64/S	ARIP15U65	ARIP15U65/S	ARIP15U66	ARIP15U66/S	ARIP24U64	ARIP24U64/S	ARIP24U65	ARIP24U65/S	ARIP24U66	ARIP24U66/S	ARIP32U66	ARIP32U66/S	ARIP38U65	ARIP38U65/S	ARIP42U65	ARIP42U65/S	ARIP42U66	ARIP42U66/S	
ARSTUD100 <sup>▲</sup>	Pack of 100	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
ARSTUD20 <sup>▲</sup>	Pack of 20	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

<sup>▲</sup> Available on request



Rack Studs





# Ausrack IP

Accessories to suit Ausrack IP enclosures



## Standard Locks

Enclosure Height (mm)		
	<1600	IP020 – chromed steel with 7mm square steel insert
1600+	IP050 – lockable L handle keyed to 92268	IP050 – lockable L handle keyed to 92268

## Lock Options

There are a number of lock options available that are suitable for use on all Ausrack IP enclosures. Contact your local sales representative to discuss your requirements.

Product	Description	Part Number	Standard Lock/Insert	Alternative insert	Keys		
					Lockable handles	Plastic, 3-way	Aluminium, 3-way
Turnbuckle	chromed steel	IP020	7mm square – steel	See below	–	SKU	SKZ
	stainless steel	IP020/S	7mm square – stainless steel	See below	–	SKU	SKZ
Wing knob	lockable	IP030	Key code 92268	–	SK3	–	–
	lockable	IP030/CL001	Key code CL001				
	lockable	IP030/L003	Key code L003				
	non-lockable	IP111	–	–	–	–	–
T handle	lockable	IP040	Key code 92268	–	SK3	–	–
L handle	lockable	IP050	Key code 92268	–	SK3	–	–
	padlockable	IP052	–	–	–	–	–
Swing handle, padlockable	chrome	IP060	–	–	–	–	–
	stainless steel	IP060/S	–	–	–	–	–

## Lock Inserts for IP20 Locks

The IP20 locks are available with an option lock insert for use on all Ausrack IP enclosures. Contact your local sales engineer to discuss your requirements.

To suit lock style	Description	To suit lock	Standard Insert	3mm double bit pin		8mm square		8mm triangle	
				Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel
Turnbuckle	chromed steel	IP020	7mm square – steel	LKINS3P	–	LKINS8S	–	LKINS8T	–
	stainless steel	IP020/S	7mm square – stainless steel	–	LKINS3P/S	–	LKINS8S/S	–	LKINS8T/S
Key required – aluminium			SKZ	SKZ	SKZ	SK8	SK8	SKZ	SKZ
Key required – plastic			SKU	SKU	SKU	–	–	SKU	SKU

## AUSTRALIA

### Sales

T: 1300 Enclosures (1300 362 567)  
F: 1300 796 599  
E: sales@brenclosures.com.au  
[brenclosures.com.au](http://brenclosures.com.au)

### QUEENSLAND

Brisbane Manufacturing, Sales & Warehouse  
51 Stradbroke Street  
Heathwood QLD 4110  
(PO Box 1151)  
Browns Plains BC QLD 4118  
T: +61 7 3714 1111  
F: +61 7 3714 1091  
E: salesqld@brenclosures.com.au

### NORTH QUEENSLAND

Townsville Sales & Warehouse  
Unit 4 / 780 Ingham Rd, Mount Louisa  
(PO Box 7615),  
Garbutt QLD 4814  
T: +61 7 4727 1900  
E: salestvl@brenclosures.com.au

### NEW SOUTH WALES

NSW & ACT Sales & Warehouse  
Unit 12 / 100 Belmore Road North  
(PO Box 192)  
Riverwood NSW 2210  
T: +61 2 9915 9555  
F: +61 2 9584 0055  
E: salesnsw@brenclosures.com.au

### NEWCASTLE Distribution

Ross Joice Agencies Pty Ltd  
109-111 Broadmeadow Road  
Broadmeadow NSW 2292  
T: +61 2 4961 4433  
F: +61 2 4961 2498

### VICTORIA

VIC & TAS Sales & Warehouse  
50-52 Sunmore Close  
Heatherton VIC 3202  
T: +61 3 9552 0552  
F: +61 3 9551 8636  
E: salesvic@brenclosures.com.au

### TASMANIA Distribution

W P Martin Pty Ltd  
85 Elizabeth Street  
Launceston TAS 7250  
T: +61 3 6331 5545  
F: +61 3 6331 4256

### SOUTH AUSTRALIA

SA & NT Manufacturing, Sales & Warehouse  
505 Grand Junction Road  
Wingfield SA 5013  
T: +61 8 8417 6222  
F: +61 8 8268 3675  
E: salessa@brenclosures.com.au

### NORTHERN TERRITORY Distribution

Jewell Distributors Pty Ltd  
Cnr Hidden Valley & Beaton Roads  
Berrimah NT 0828  
T: +61 8 8947 0870  
F: +61 8 8947 0764

### WESTERN AUSTRALIA

WA Sales Office & Warehouse  
6 Montgomery Way  
Malaga WA 6090  
T: +61 8 6310 4777  
F: +61 8 9249 6776  
E: saleswa@brenclosures.com.au

## NEW ZEALAND

### Sales

B&R Enclosures Limited  
T: 0800 Enclosures (0800 362 567)  
E: sales@brenclosures.co.nz  
[brenclosures.co.nz](http://brenclosures.co.nz)

### AUCKLAND Distribution

Matchmaster  
Unit 6/103 Cryers Road  
East Tamaki Auckland NZ 2013  
T: +64 9 265 2097  
F: +64 9 265 2437  
E: sales@brenclosures.co.nz

### CHRISTCHURCH Distribution

Matchmaster  
17 Washbournes Road  
Wigram Christchurch NZ 8042  
T: +64 3 348 0659  
F: +64 3 348 4043  
E: sales@brenclosures.co.nz

## CHINA

B&R Enclosures (Suzhou) Co. Ltd  
E: sales@brenclosures.com.cn  
[brenclosures.com.cn](http://brenclosures.com.cn)

### SUZHOU

Manufacturing, Sales & Warehouse  
South Block, Building 23 Chuangtou  
Industrial Zone Heshun Road, SIP,  
Suzhou 215122  
PEOPLE'S REPUBLIC OF CHINA  
T: +86 512 8718 2139  
F: +86 512 8718 2140  
E: sales@brenclosures.com.cn

## SOUTH EAST ASIA

### Sales

Manufacturing, Sales & Warehouse  
B&R Enclosures SDN BHD  
No.38-1, Puchong Gateway Square,  
Jalan Suria Puchong 4  
Pusat Perniagaan Suria Puchong  
47110, Puchong, Selangor, Malaysia  
M: +601 2350 2568  
T: +603 8958 3923  
F: +603 8958 3223  
E: sales@brenclosures.com.my  
[brenclosures.com.my](http://brenclosures.com.my)

### MALAYSIA Distribution

MTW Controls SDN BHD  
42 Puchong Gateway Square  
Jalan Suria Puchong 4  
47110 Puchong Darul Ehsan  
Kuala Lumpur, MALAYSIA  
M: +601 227 7637 3  
E: ckwoon@mtwcontrols.com.my

### INDONESIA Distribution (Office)

P.T Reitama Engineering  
Jl. Margonda Raya No. 139  
Depok, INDONESIA 16413  
T: +62 21 7783 7078 (Hunting)  
F: +62 21 7783 7079  
M: +62 81 1979 7772  
E: sales@reitama-engineering.com

## MIDDLE EAST

### Sales

Manufacturing, Sales & Warehouse  
B&R Gulf  
Factory No. 12, Modon Buildings  
King Salman Road, Industrial Area 3  
Dammam, Kingdom of Saudi Arabia  
T: +96 638 128 691 or +96 650 349 6592  
E: sales@brgulf.com.sa  
[brgulf.com.sa](http://brgulf.com.sa)

### UAE Distribution

Engineering Support Systems Est.  
PO Box 33904 Defence Street  
Ashtel Mobile Shop Bldg.  
Mezzanine Floor, Room M2  
Abu Dhabi, UNITED ARAB EMIRATES  
T: +971 2641 1844  
E: esse@emirates.net.ae

### OMAN Distribution

Global Corp Enterprices LLC  
PO Box 1524  
Al Khuwair, OMAN  
M: +968 9929 4323  
E: rakesh@globalcorpoman.com

### QATAR Distribution

Petrogulf Qatar  
WLL Doha  
QATAR  
T: +974 4435 0151  
E: amit@petrogulf.org