





# VISTA

VISTA20W06-TRI

SAP CODE: 2001157

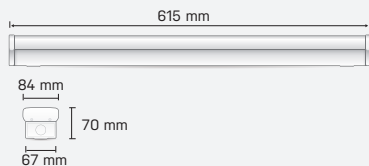

Photometric Diagram



Unit: cd  
 - C0/180 110.0deg  
 - C90/270 110.0deg

600mm, 20W,  
Tritone, conventional  
appearance LED batten

An LED replacement for  
conventional battens with  
Tritone switchable colour  
temperature.

## Accessories

SUSPENSION KIT; WIREGUARD

## KEY INFORMATION

Lumen Output	2000 / 2200 / 2100lm
Input Power	20W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

## PHOTOMETRIC

Efficacy	100 / 110 / 105lm/W
LED	SMD
CCT	4000 / 4700 / 5700K
CRI	>80
Beam Angle	120°

## ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	20-57VDC
Power Factor	>0.9
LED Input Current (nominal)	350mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	0.8kg
Dimensions	615x84x70mm
Operating Ambient Temp.	-30 to 50°C
Electrical Classification	Class 1
Food Grade Approval	HACCP