


UNIVERSAL CAT6A, STP, RJ45 MODULAR KEYSTONE JACK

COMES IN PACKS OF 10

PART NUMBER: **KSSC6AQ-10**

BARCODE: **9352399001498**

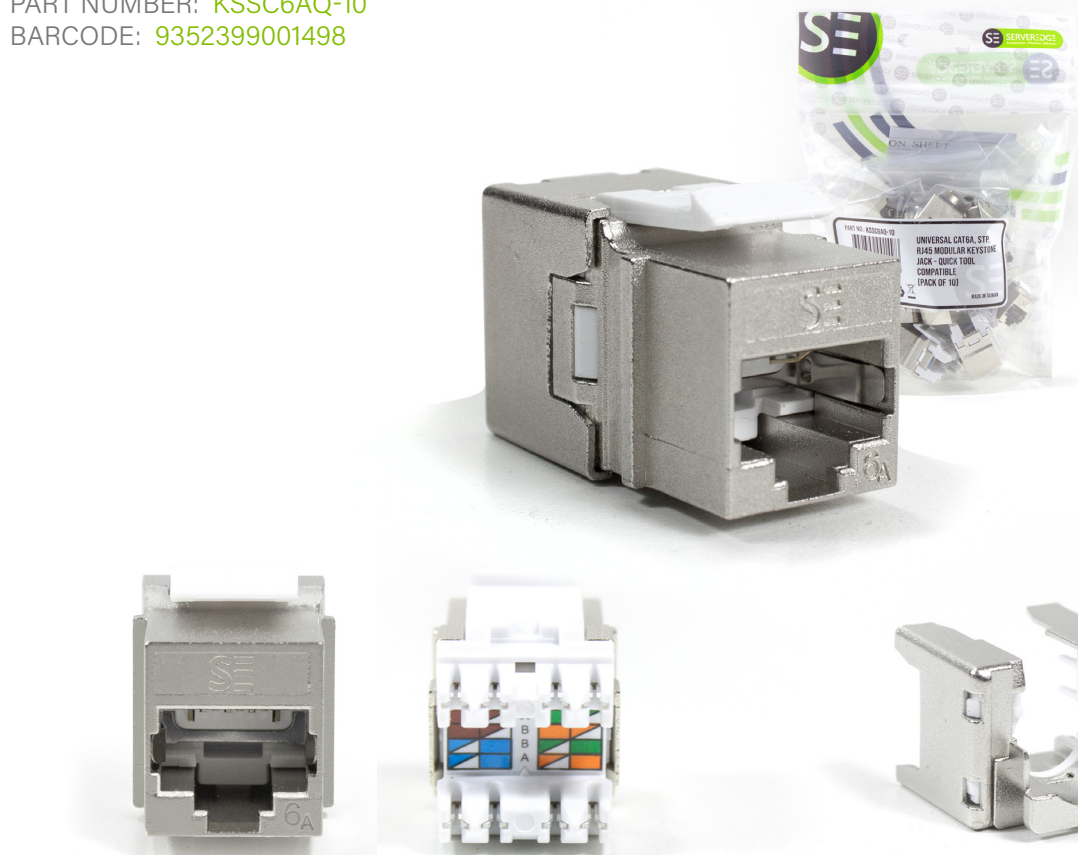

PRODUCT DESCRIPTION

These modular shielded keystone jacks are colour coded for both 568A and 568B standards and can be terminated using a standard 110 or Krone Tool. Designed to work best with Serveredge Cat6A shielded cables and standard Cat6A shielded cables. Serveredge Quick Tool, product code QTKS, is now available saving time and money when terminating multiple jacks. Wire retaining caps are supplied and can be used to provide additional cable strain relief.

PRODUCT FEATURES

- ISO/IEC 11801 compliant.
- UL 94V-O rated.
- Solid 22-24 AWG diameter conductors.
- Universal colour-coding 568A/568B.
- Lead frame technology eliminates PCB failures
- Serveredge Quick Tool (QTKS) compatible

PRODUCT INCLUDES

- RJ45 Shielded Keystone Jacks × 10
- Wire Cap × 10
- Wire Ties × 10

GUARANTEE/WARRANTY

Serveredge products are manufactured at the highest standards using highest quality materials at an affordable price. This Serveredge product comes with a 2 years warranty standalone or a 25 years warranty as part of a certified structured cabling project. Subject to Serveredge Terms and Conditions*

SPECIFICATIONS

Meet all requirements specified in connecting hardware requirement of

Draft ISO/IEC 11801 amendment 2, Category 6A

Draft ISO/IEC 60603 -7-51

ANSI/ TIA- 568 - C.2, Category 6A

ELECTRICAL

Electrical Insulation Resistance 500 MO min. @ 100V d.c

Dielectric Withstanding Voltage 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute

MECHANICAL

Insertion / Extraction Life 750 Cycles Minimum IDC Wire Gauge : 22 ~ 24 AWG

PHYSICAL

Housing Zinc-alloy fully shielded

Spring Wire Phosphor Bronze Alloy Plated With 50 micro-inch of Gold

ANSI/ TIA- 568 - C.2, Category 6A Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy