


LX1FK110

TeSys F - contactor coil - LX1FK - 110...120 V AC
40...400 Hz

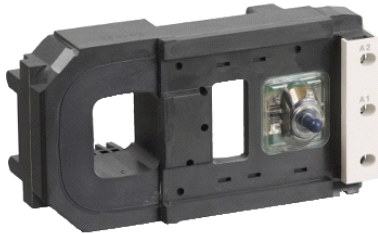

Main

Range	TeSys
Product or component type	Contactor coil
Device short name	LX1FK
Range compatibility	TeSys F LC1F contactor
Product compatibility	LC1F500
Control circuit type	AC 40...400 Hz
[Uc] control circuit voltage	110...120 V AC 40...400 Hz
Average resistance	9.55 Ohm inrush at 20 °C 260 Ohm holding at 20 °C
Inductance of closed circuit	1.25 H
Operating time	40...75 ms closing 100...170 ms opening
Mechanical durability	10 Mcycles
Operating rate	<= 2400 cyc/h at <= 55 °C

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.85...1.1 Uc at 55 °C operational 40...400 Hz 0.3...0.5 Uc at 55 °C drop-out 40...400 Hz
Inrush power in VA	1100 VA at 20 °C (cos f 0.9) 40...400 Hz
Hold-in power consumption in VA	18 VA at 20 °C (cos f 0.3) 40...400 Hz
Heat dissipation	18 W at 40...400 Hz

Environment

ambient air temperature for operation	> -5...55 °C
product weight	1.15 kg

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0830 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.