


## VZ12

TeSys VARIO - additional neutral block - 80 A - for  
V3 / V4

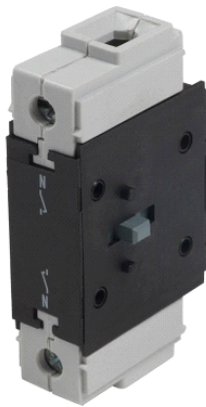

### Main

Range	TeSys
Device short name	VZ
Product or component type	Additional neutral block
Performance level	High performance
Poles description	1N
Contacts type and composition	1 NO
Contact operation	Early make, late break
Product compatibility	V3 V4
Range compatibility	TeSys VARIO switch disconnecter
Network type	AC DC
Network frequency	50/60 Hz

### Complementary

Mounting location	Left Right
[Ue] rated operational voltage	690 V AC 50/60 Hz
[Uimp] rated impulse withstand voltage	6 kV
[Ith] conventional free air thermal current	80 A
Mechanical durability	30000 cycles
Electrical durability	30000 cycles DC-1...5 30000 cycles AC-21
Connections - terminals	Screw clamp terminals cable 16 mm <sup>2</sup> - cable stiffness: flexible - with cable end Screw clamp terminals cable 25 mm <sup>2</sup> - cable stiffness: solid
Tightening torque	4 N.m - on screw clamp terminals
Height	83 mm
Width	20 mm
Depth	46 mm
Product weight	0.1 kg

### Environment

standards	IEC 60947-3
product certifications	CSA GL UL
protective treatment	TC
IP degree of protection	IP20 conforming to IEC 60529
mechanical robustness	Shocks 11 ms 15 gn IEC 60068-2-27 Vibrations 10...150 Hz 1 gn IEC 60068-2-6
ambient air temperature for operation	-20...50 °C
fire resistance	960 °C conforming to IEC 60695-2-1

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.