


## GB2DB07

TeSys GB2 - thermal-magnetic circuit breaker - 2P -  
2 A -  $I_d = 26$  A

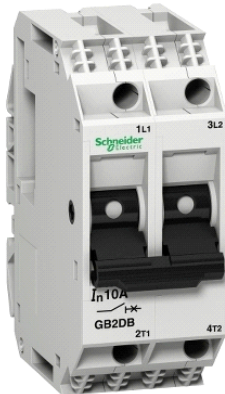

### Main

Range	TeSys
Product name	TeSys GB2
Device short name	GB2
Product or component type	Circuit breaker
Device application	Control
Poles description	2P
Network type	AC/DC
Utilisation category	Category A conforming to IEC 60947-2 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1
Network frequency	50/60 Hz conforming to IEC 60947-2
Breaking capacity	$I_{cu} = 15$ kA at 400/415 V AC 50/60 Hz conforming to IEC 60947-2 $I_{cu} = 1$ kA at 48 V DC conforming to IEC 60947-2 $I_{cu} = 15$ kA at 110 V AC 50/60 Hz conforming to IEC 60947-2 $I_{cu} = 1.5$ kA at 24 V DC conforming to IEC 60947-2 $I_{cu} = 15$ kA at 230/240 V AC 50/60 Hz conforming to IEC 60947-2
[Ics] rated service short-circuit breaking capacity	50 % at 110 V AC 50/60 Hz conforming to IEC 60947-2 25 % at 230/240 V AC 50/60 Hz conforming to IEC 60947-2 25 % at 400/415 V AC 50/60 Hz conforming to IEC 60947-2
Trip unit technology	Thermal-magnetic
Magnetic tripping current	26 A

### Complementary

Mounting mode	By clips
Mounting support	Plate Rail
Mounting position	Horizontal Vertical
Control type	Toggle
[In] rated current	2 A
[Ue] rated operational voltage	415 V AC 50/60 Hz conforming to IEC 60947-2 277 V AC 50/60 Hz conforming to UL 1077 277 V AC 50/60 Hz conforming to CSA C22.2 No 14
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-2
Power dissipation per pole	2 W
Mechanical durability	8000 cycles
Electrical durability	8000 cycles
Connections - terminals	Connector 1 cable(s) 0.75...6 mm <sup>2</sup> - cable stiffness : solid - without cable end Connector 2 cable(s) 0.75...4 mm <sup>2</sup> - cable stiffness : solid - without cable end Connector 1 cable(s) 0.75...4 mm <sup>2</sup> - cable stiffness : flexible - with cable end Connector 2 cable(s) 0.75...2.5 mm <sup>2</sup> - cable stiffness : flexible - with cable end
Tightening torque	1.2 N.m - on connector
Mechanical robustness	Shocks 22 Gn for 20 ms conforming to IEC 60068-2-27 Vibrations 5 Gn, 5...110 Hz conforming to IEC 60068-2-6
Quantity per set	Set of 3
9 mm pitches	4

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Height	74 mm
Width	30 mm
Depth	70 mm
Product weight	0.115 kg

## Environment

standards	EN 60947-1 EN 60947-2 IEC 60947-1 IEC 60947-2
protective treatment	TC
IP degree of protection	IP20 conforming to IEC 60529
ambient air temperature for operation	-20...60 °C
ambient air temperature for storage	-40...80 °C
fire resistance	960 °C conforming to IEC 60695-2-1
operating altitude	3000 m

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0627 - Schneider Electric declaration of conformity
REACH	Reference contains SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations