



TL-D LIFEMAX Super 80 JIS

TL-D 18W/840 JIS 1SL/25


The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires. The lamp is complying with Japanese Industrial Standard.

Product data

General Information		Controls and Dimming	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	No
Life To 10% Failures (Nom)	10000 h		
Life to 50% Failures (Nom)	13000 h		
Life to 50% Failures Preheat (Nom)	20000 h		
Light Technical		Mechanical and Housing	
Color Code	840 [CCT of 4000K]	Cap-Base Information	Green Cap
Luminous Flux (Nom)	1450 lm		
Color Designation	Cool White (CW)		
Lumen Maintenance 2000 h (Nom)	96 %		
Lumen Maintenance 5000 h (Nom)	94 %		
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	80.5 lm/W		
Color Rendering Index (Nom)	82		
Operating and Electrical		Approval and Application	
Power (Rated) (Nom)	19 W	Mercury (Hg) Content (Nom)	2.0 mg
Lamp Current (Nom)	0.35 A		
Voltage (Nom)	65 V		
		Product Data	
		Full product code	871150062989000
		Order product name	TL-D 18W/840 JIS 1SL/25
		EAN/UPC - Product	8711500629890
		Order code	927919984033
		Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	25
		Material Nr. (12NC)	927919984033
		Net Weight (Piece)	0.080 kg

TL-D LIFEMAX Super 80 JIS

Dimensional drawing

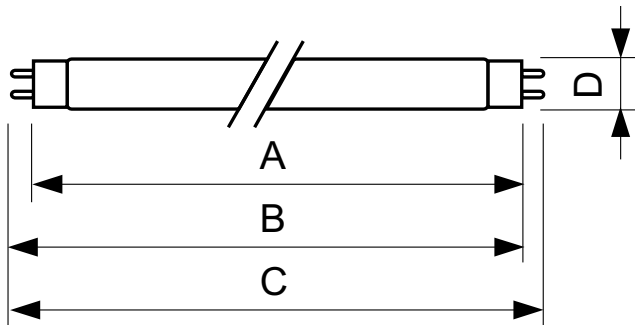

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 18W/840 JIS 1SL/25	28 mm	581.3 mm	588.4 mm	585.8 mm	595.5 mm

TL-D 18W/840 JIS

