



Representative Photo Only
(actual product may vary based on configuration selections)

Earth Terminal 2.5mm 3Con Front

- Self-contained cage clamp assembly allows for quick and easy wire termination while ensuring contact quality
- Cage clamp terminals developed to suit a wide range of wire cross sections from 0.08 – 35mm²
- Alternate or staggered jumpers made in the field by simply breaking and removing jumper contacts
- Wide variety of terminal sizes and configurations including multiple conductors and decks, earth, sensor, high-current, fused and disconnect terminals
- Modular PCB terminal strips with cage clamp connection in various sizes and pin-spacing to suit any PCB solution
- Multi-connection system and WINSTA plugs and sockets suitable for lighting, power, and control connections
- Full range of accessories to complement any wire-termination solution

SPECIFICATIONS

Product Series	280
Component Type Termination Wiring	Terminal
Number of Conductors	3 qty
Number of Potentials	1
Connection / Termination	Cage Clamp Terminal(s)
Colour, Body / Housing	Green & Yellow (Earth) colour
Conductor Entry Position	Front
Conductor Entry Angle	Horizontal
Wire / Conductor Size, Rigid Cable, Min	0.08 mm ² min
Wire / Conductor Size, Rigid Cable, Max	2.5 mm ² max
Wire / Conductor Size, Flex Cable, Min	0.08 mm ² min
Wire / Conductor Size, Flex Cable, Max	2.5 mm ² max
Wire Strip Length, Min	8 mm
Wire Strip Length, Max	9 mm
Marking Position	Centre
Fire Load	0.11 MJ
Mounting	DIN-35 Rail Mount
IECEX Certified	No
Height	64 mm
Width	5 mm
Depth	28 mm
Weight	0.011283 kg
Vibration Displacement (Peak to Peak Max.)	0 mm
Certifications	KEMA CSA UL RoHS CCA


Catalogue No: **280-687**
SCREWLESS TERMINAL 2.5mm 3 CONDUCTOR 24A EARTH GREEN/YELLOW

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screwless > WAGO Screwless Terminals > Series 280 - 2.5mm² Cage Clamp Terminals > Earth terminals



Shipping Approvals	ABS (American Bureau of Shipping) BV (Bureau Veritas) Lloyd's Register of Shipping DNV-GL (Det Norske Veritas Germanischer Lloyd) PRS (Polish Register of Shipping)
--------------------	---

REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	280687_Manufacturer Catalogue

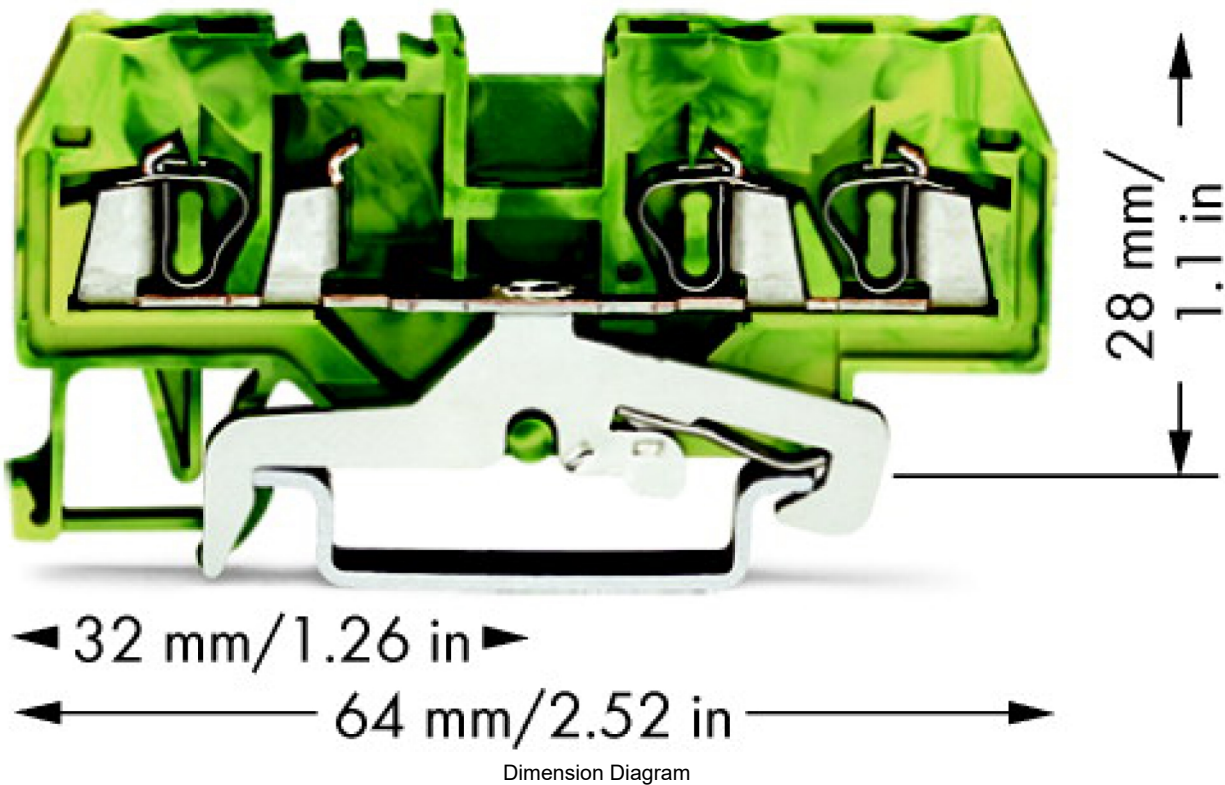

Catalogue No: **280-687**

SCREWLESS TERMINAL 2.5mm 3 CONDUCTOR 24A EARTH GREEN/YELLOW

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screwless > WAGO Screwless Terminals > Series 280 - 2.5mm² Cage Clamp Terminals > Earth terminals



Connection / Wiring Diagram