

Catalogue No: **GH15GN-04-110VAC**

CONTACTOR 18.5kW 4P NC 110V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Ghisalba Contactors > GH15 Contactor Range > 4 Pole Contactors 4 to 160kW



Representative Photo Only
(actual product may vary based on configuration selections)

Contactor 4 pole 40A 18.5kW 4N/C 110V AC Coil

- Various contactor families, providing a wide variety of contactor sizes, offering economy and selection

SPECIFICATIONS

Component Type Motor Control and Drives	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 40°C	63 A@415V,40°C
Ie, Rated Operational Current, AC-1, 690V, 40°C	63 A@690V,40°C
kW Rating, AC-3, 415V, 55°C	18.5 kW @415V, 55°C
Ie, Rated Operational Current, AC-3, 415V, 55°C	40 A@415V,55°C
kW Rating, AC-3, 690V, 55°C	18.5 kW @690V, 55°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	18 A@690V,60°C
Number of Poles	4
Contact Configuration, Main Poles	4 NC main poles
Coil Type	Conventional type
Coil Voltage	110 V AC V
Product Notes	AC Contactors 4 pole open type
IP Rating	IP20


REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **GH15GN-04-110VAC**

CONTACTOR 18.5kW 4P NC 110V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Ghisalba Contactors > GH15 Contactor Range > 4 Pole Contactors 4 to 160kW

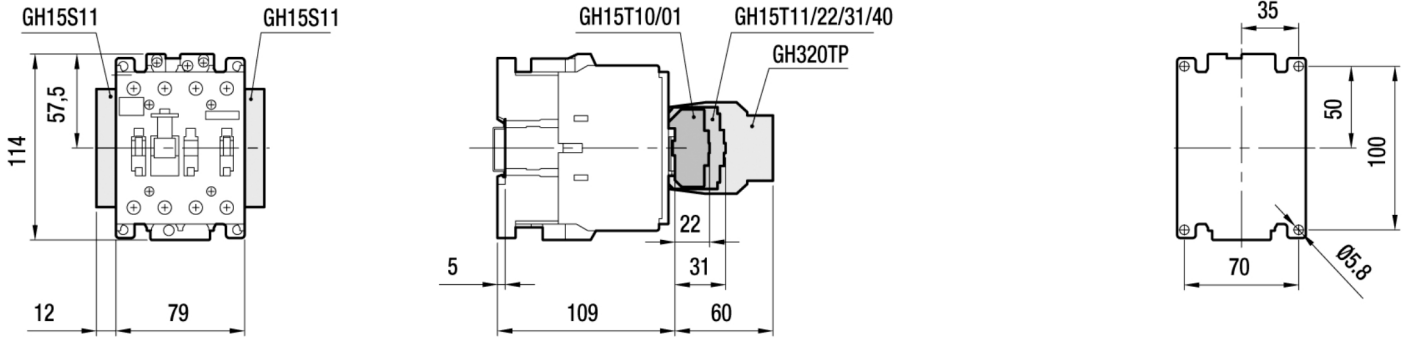

Dimension Diagram