

Catalogue No: MOD6-SD2-20-230

SURGE DIVERTER MOD6 1P+N 20kA

Power Distribution and Protection > Switchboard Monitoring > Surge Protection > MOD6 Electrical Network Surge Diverters




Representative Photo Only
(actual product may vary based on configuration selections)

MOD6 surge diverter, 1P+N, 20kA, DIN mount, 2 modules wide

- MOD6 Electrical Network Diverters are a range of devices for discharging induced transient overvoltages (Type 2 / Class II), in accordance with IEC 61643-11
- DIN rail plug-in format
- Suitable for the second stage of protection in supply distribution panels in which Type 1 protection devices are installed, or for the first stage of protection in residential, commercial or other applications not exposed to direct strikes and with no external lightning protection system
- High discharge capacity with an 8/20 μ s waveform. Imax: 40 kA or 30 kA
- Remote and visual indication of life status of the protection device
- Biconnect - two types of terminal: for rigid or flexible cable and for fork type comb busbar

SPECIFICATIONS

Product Series	MOD6
Component Type Surge Protection	Electrical Network Diverter
Number of Poles	2
Poles	1P + N
Number of DIN Modules	2
Un, Nominal Operational Voltage, AC	230 V AC
Un, Nominal Voltage, AC, L-L	230 V AC
Uc, Continuous Operating Voltage, AC, Max	320 V AC
In, Discharge Current, (8/20) L-N, Nom	10 kA
Imax, Discharge Current, (8/20) L-N, Max	20 kA
Icc, Current, Short Circuit Withstand	25 kA
Fuse Current Rating, Max	63 A
Protection Classification Standard	IEC 61643-11
Up, Voltage Protection Level	1.4 kV @In
Rated Frequency	50 / 60 Hz
Protection Modes	L+N-PE modes
Protection class	2
Replaceable Modules	No Y/N
Visual Indication	Yes Y/N
Indicator Type	Red / Green Flag
Remote Monitoring	Yes Y/N
Monitoring Contact Configuration	1 CO Contact
Mounting	DIN-35 Rail Mount
Wire / Conductor Size, Flex Cable, Min	6 mm ² min
Wire / Conductor Size, Flex Cable, Max	25 mm ² max
Wire / Conductor Size, Rigid Cable, Min	6 mm ² min
Wire / Conductor Size, Rigid Cable, Max	35 mm ² max
Colour, Body / Housing	Grey Anthracite colour

Catalogue No: **MOD6-SD2-20-230**


SURGE DIVERTER MOD6 1P+N 20kA

Power Distribution and Protection > Switchboard Monitoring > Surge Protection > MOD6 Electrical Network Surge Diverters



IP Rating	IP20
tA, Response time (L-N)	25 ns
tA, Response time (N-PE)	100 ns
Tightening Torque, Nominal	4 Nm
Height	90 mm
Width	36 mm
Depth	70 mm
Operating Temperature, Min	-40 °C min
Operating Temperature, Max	80 °C max
Standards Compliance	IEC 61643-1 IEC 61643-11


REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

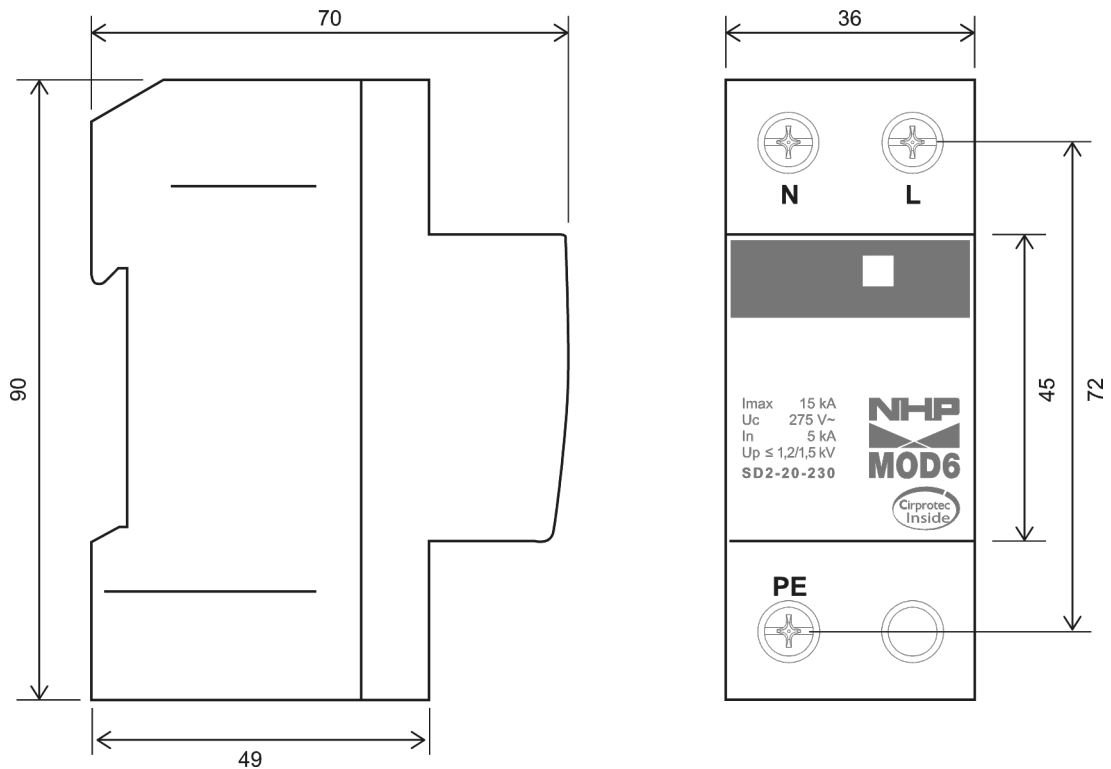

Catalogue No: **MOD6-SD2-20-230**

SURGE DIVERTER MOD6 1P+N 20kA

Power Distribution and Protection > Switchboard Monitoring > Surge Protection > MOD6 Electrical Network Surge Diverters

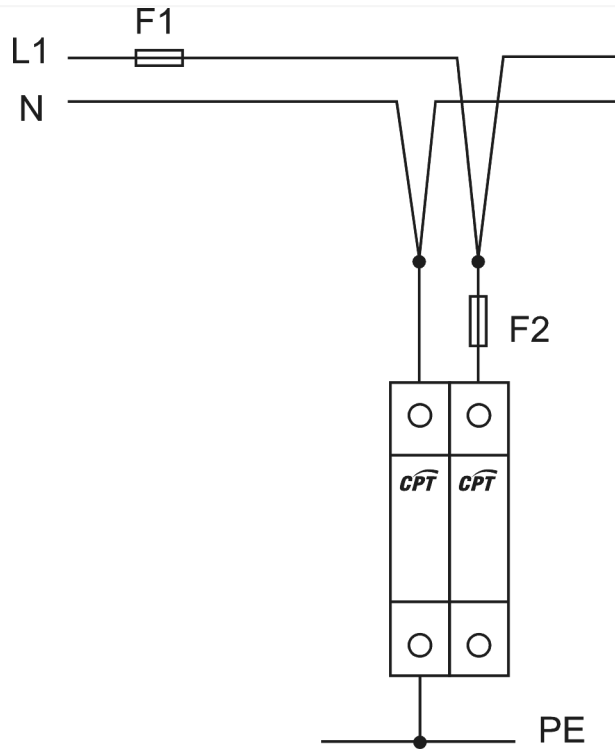

Connection / Wiring Diagram