

800TFXT6D4


Allen-Bradley 800T PB 30.5mm Mush. Head 2 Pos. Push Pull
Twist to Rel. 1N.C. Late Break Contact Red



Allen-Bradley

by ROCKWELL AUTOMATION

PUSHBUTTON AND PILOT LIGHTS

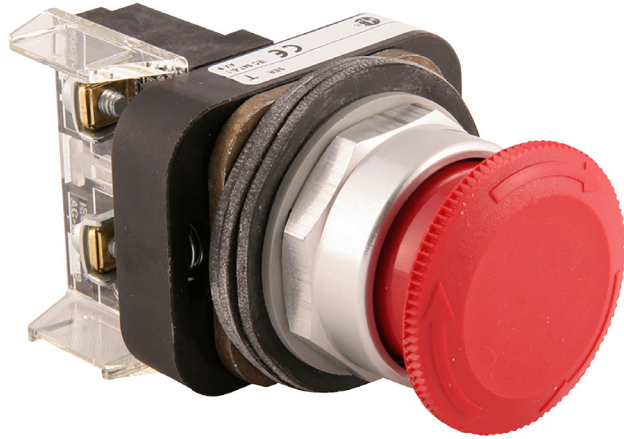

Component type	Push button, complete
Range	800T/H Pushbutton
Model	N/A
Product status	Existing

The Allen-Bradley 800T/H range of 30.5mm mount operators are designed and constructed to perform in the most demanding industrial environments. The range includes pushbuttons, selector switches, emergency stops, pilot lights. Available in both metal and plastic types with a modular design allowing for easy selection, configuration and assembly of components to form the operator control device.

ELECTRICAL	Number of contacts as normally open contact	0.0
	Number of contacts as normally closed contact	1.0
	Type of electric connection	Screw connection
CONSTRUCTION	Colour button	Red
	Type of button	Mushroom
	With front ring	Yes
	Material front ring	Metal
	Degree of protection (IP)	IP65/IP66
MECHANICAL	Number of command positions	2.0
	Switching function latching	No
	Shock acceleration (Max)	100.0 g
	Vibration acceleration (Max)	10.0 m/s ²
	Vibration frequency, operational (Max)	2000.0 Hz
PHOTOMETRIC	Suitable for illumination	No
DIMENSIONS	Hole diameter	30.5 mm
	Operator diameter	41.3 mm

800TFXT6D4

Allen-Bradley 800T PB 30.5mm Mush. Head 2 Pos. Push Pull
Twist to Rel. 1N.C. Late Break Contact Red



Allen-Bradley

by ROCKWELL AUTOMATION

PUSHBUTTON AND PILOT LIGHTS

DIMENSIONAL DIAGRAM

Non-Illuminated Push-Pull Buttons

Cat. No. Suffix	Description	Transformer Type		
		Dim.	Ship. Wt.	
D4	One Shallow Contact Block	A	2-1/32 (51.6)	5 oz. (0.14 kg)