

# SSM1A112P7R

solid state relay - DIN rail mount - input 200-265 V AC, output 24-280 V AC ,12A



## Main

Range of product	Zelio Relay
Product or component type	Solid state relay
Device short name	SSM
Number of channels	1
Network number of phases	1 phase

## Complementary

Mounting support	Symmetrical DIN rail
[In] rated current	12 A
Output voltage	24...280 V AC
[Uc] control circuit voltage	200...265 V AC
Contacts type and composition	1 NO
Tightening torque	Input : 0.5...0.8 N.m Output : 0.5...0.8 N.m
Connections - terminals	Screw terminals : 1 x 0.3...1 x 1.5 mm <sup>2</sup> , (AWG 22...AWG 16) for input Screw terminals : 1 x 0.3...1 x 2.5 mm <sup>2</sup> , (AWG 22...AWG 14) for output
Capacitance unbalance	<= 10 pF for input/output
Insulation resistance	1000 MOhm at 500 V DC
Local signalling	LED green for input status
Minimum switching voltage	200 V AC turn-on
Maximum switching voltage	90 V AC turn-off
Input current limits	2.5...3.5 mA
Solid state output type	SCR output Random voltage switching
Load current	0.00015...12 A
Absolute maximum voltage	600 V
Surge current	<= 715 A for 16.6 ms <= 750 A for 20 ms
Voltage drop	<= 1.3 V on-state
Motor power hp	0.33 hp at 40 °C 240 V AC
Maximum I <sup>2</sup> t for fusing	2560 A <sup>2</sup> .s for 10 ms at 50 Hz half cycle 2330 A <sup>2</sup> .s for 8.33 ms at 60 Hz half cycle
Leakage current	<= 0.1 mA off-state
DV/dt	500 V/μs off-state at maximum voltage
Response time	30 ms turn-off 20 ms turn-on
Cos phi	>= 0.5 with maximum load
Overvoltage category	III
Width	18 mm
Height	90.3 mm
Depth	83.7 mm
Product weight	0.09 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


## Environment

flame retardance	V0 conforming to UL 94
dielectric strength	4 kV AC for input/output 4 kV AC for input or output to case
pollution degree	2
standards	IEC 61000 IEC 60950-1 IEC 62314
product certifications	CSA UL REACH
marking	CE
IP degree of protection	IP20
ambient air temperature for operation	-30...80 °C
ambient air temperature for storage	-30...100 °C


## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1328 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

## Dimensions

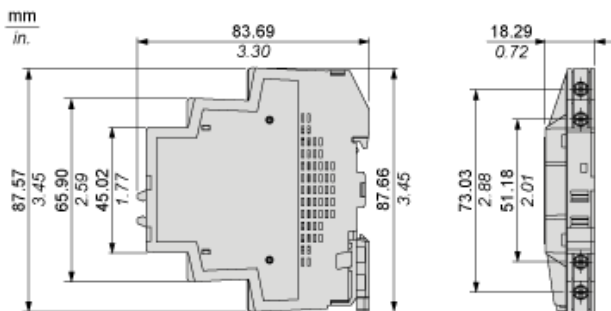

## Derating Curves

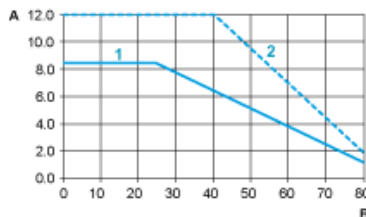

A : Load Current (Amperes)

B : Ambient Temperature (°C)

1 : Multiple units, no minimum spacing between components

2 : Installed single unit, distance to adjacent components more than 18 mm