

Queensland meterbox

Catalogue number:

VYMBQ
VYMBQ-P

Specifications:

Regulatory


- Complies with AS/NZS 3000 and AS/NZS 3012

Materials

- 1.2mm Z275 galvanised steel
- Powdercoated RAL7035
- Panel - white

Mechanical

- IP23
- 24 Pole DIN (VYMBQ)
- Available as a meters only enclosure (panel only) - VYMBQ-P

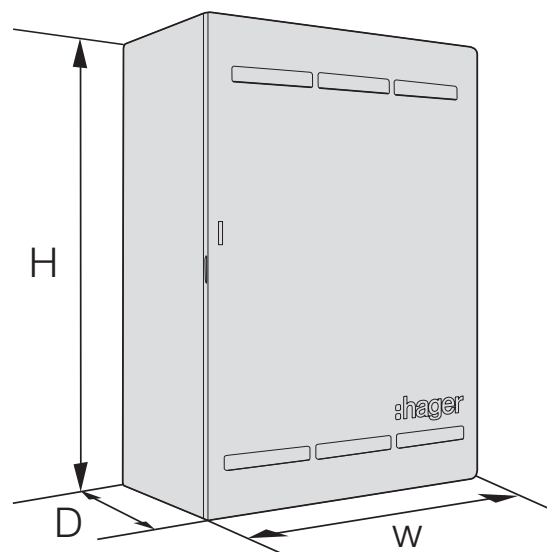

Electrical

- Clear service isolation link fitted
- Consumer neutral link
- 3 x RCD Neutral links
- Earth link

Component Bag VYMBQ only

- 20 x pole fillers
- 12 pole busbar (KDN180A)
- 3 x cable ties
- Door padlock kit
- 1 x 6mm cable lug
- 1 x Circuit ID label sheet
- 1 x Meter Neutral link cover

Spare parts

- VZMB001 Heat compression moulded BMC QLD panel - white (RAL 7035)
- VZMB004 Meter Box Spare Door - suits VYMBQ/V/NSW

All measurements are in mm	Enclosure			Panel			Depth behind panel
	H	W	D	H	W	D	
VYMBQ	688	488	278	480	460	6	75
VYMBQ-P	520	488	278	480	460	6	75

*Height of cable entry cover on top of enclosure = 9mm

Features:

Patented cord retainer	Internal and external powdercoating
Flush door catch	Door padlock kit
Captive escutcheon screws	Vinyl labels for circuit ID and mains location
Easy tighten top cable entry slider	