

ODYSSEY QUANTUM WIREGUARD




Steel Batten Range at the Right Price

The Odyssey Quantum steel batten range has been designed as an ideal solution for projects or applications where an economy or lower cost batten option is required.

Without compromising on features such as Lithium Iron Phosphate battery technology or emergency testing options including Zoneworks® XT Hive, DALI or CTP. Odyssey Quantum is quality at the right price.

Applications

- | | |
|--|---|
|  Car Parks |  Corridors |
|  Stairwells |  Back of House |
|  Fire Stairs | |

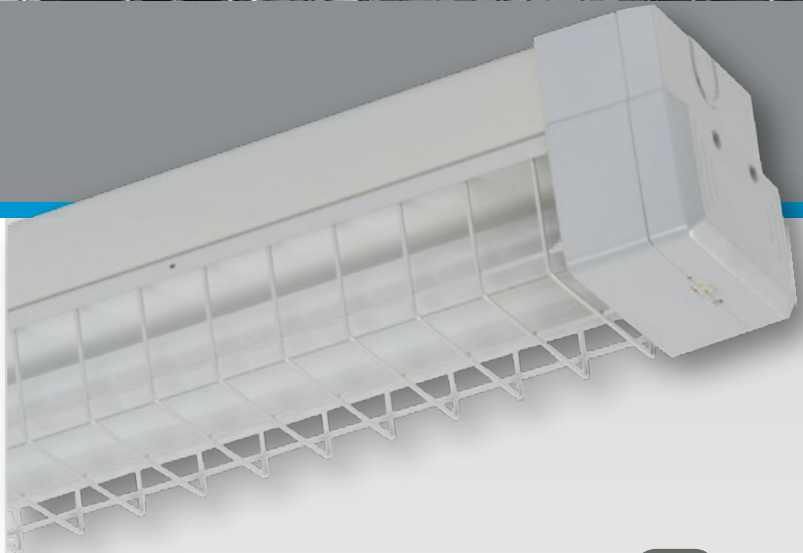

Features and Benefits

- AS/NZS 2293.3 compliant
- LED tube
- Lithium Iron Phosphate Battery
- Microwave motion sensors
- Zoneworks® XT Hive or DALI test options (with LP Premium)
- Clevertest Plus System compatible



ODYSSEY QUANTUM WIREGUARD

ODYSSEY QUANTUM WIREGUARD 600MM

ORDERING INFORMATION		EL	LP	240V
Nominal Size		600mm	600mm	600mm
TEST OPTIONS PART NO.	Standard	EBS2L2S-WG-LI	CBS2L2S-LT-WG	FBS2L2-LT-WG
	Motion Sensors ■	Yes (On/Off)		
	CTP System Compatible	No	Yes	-
	DALI	-	CBS2L2S-LT-WG-DALI	-
	Zoneworks® XT Hive	-	CBS2L2S-LT-WG-HV	-
Carton Quantity		1		
Weight - single (carton)		2.2kg		1.8kg
Dimensions (L x W x H)		664mm x 120mm x 108mm		630mm x 120mm x 108mm

■ For Motion sensor version add -MS to the product code as per the following example. EBS2L2S-WG-LI-MS

TECHNICAL SPECIFICATIONS	EL	LP	240V
Construction - Base	Powder Coated Steel		
Voltage (V) (Frequency (Hz))	220-240V (50Hz)		
Power Consumption (Standby / Max) ◆	0.4W / 16W	1.0W / 17W	16W
Lamp(s) (CCT / Life) ◆	4000K / 30,000hrs (L70 / B50 Ra>80 Ta40c)		
Lamp	LED Tube		
Nominal Total Light Output ◆	1500lm		
Operating Temperature	1°C to 40°C		

◆ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	EL	LP
Operating Mode	Sustained	
Battery Configuration	POD	
Battery Type	Lithium Iron Phosphate	
Voltage / Capacity (mAh)	3.2V / 3000mAh	3.2V / 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage	

CLASSIFICATION	EL	LP
Co	D40	
C90	D40	

SPARE PARTS	EL	LP	240V
Battery	1560150	1550050	-
LED Tube	3170030	3170030	3170030

ODYSSEY QUANTUM WIREGUARD

ODYSSEY QUANTUM WIREGUARD 1200MM

ORDERING INFORMATION		EL	LP	240V
Nominal Size		1200mm	1200mm	1200mm
TEST OPTIONS PART NO.	Standard	EBS2L4S-WG-LI	CBS2L4S-LT-WG	FBS2L4-LT-WG
	Motion Sensors ■	Yes (On/Off)		
	CTP System Compatible	No	Yes	-
	DALI	-	CBS2L4S-LT-WG-DALI	-
	Zoneworks® XT Hive	-	CBS2L4S-LT-WG HV	-
Carton Quantity		4		
Weight - single (carton)		3.9kg		3.3kg
Dimensions (L x W x H)		1271mm x 120mm x 108mm		1238mm x 120mm x 108mm

■ For Motion sensor version add -MS to the product code as per the following example. EBS2L4S-WG-LI-MS

TECHNICAL SPECIFICATIONS	EL	LP	240V
Construction - Base	Powder Coated Steel		
Voltage (V) (Frequency (Hz))	220-240V (50Hz)		
Power Consumption ♦ (Standby / Max)	0.4W / 40W	1.0W / 40W	40W
Lamp(s) (CCT / Life) ♦	4000K / 30,000hrs (L70 / B50 Ra>80 Ta40c)		
Lamp	LED Tube		
Nominal Total Light Output ♦	3800lm		
Operating Temperature	1°C to 40°C		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	EL	LP
Operating Mode	Sustained	
Battery Configuration	POD	
Battery Type	Lithium Iron Phosphate	
Voltage / Capacity (mAh)	3.2V / 3000mAh	3.2V / 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage	

CLASSIFICATION	EL	LP
Co	D40	
C90	D40	

SPARE PARTS	EL	LP	240V
Battery	1560150	1550050	-
LED Tube	3170080	3170080	3170080

ODYSSEY QUANTUM WIREGUARD



SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0




For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>



600mm/2ft no pod

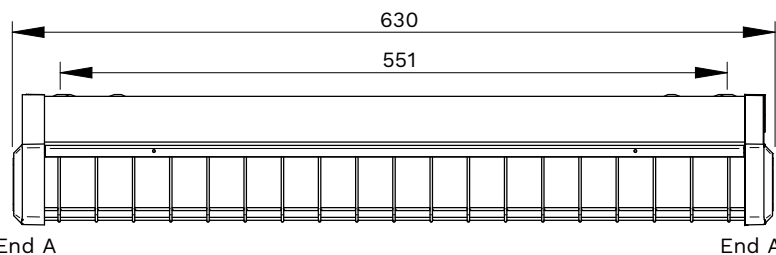




600mm/2ft with pod

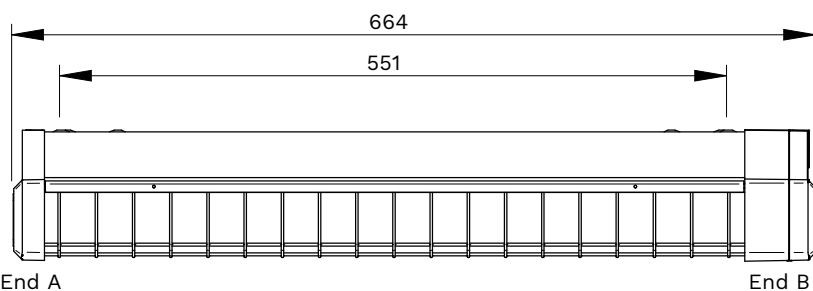

1200mm/4ft no pod

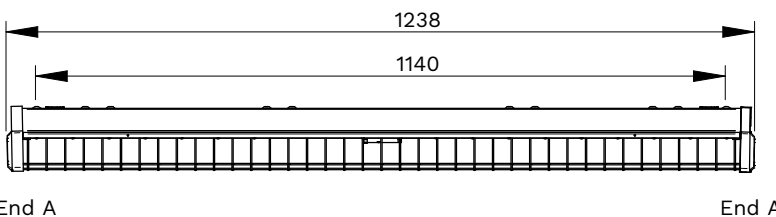

1200mm/4ft with pod

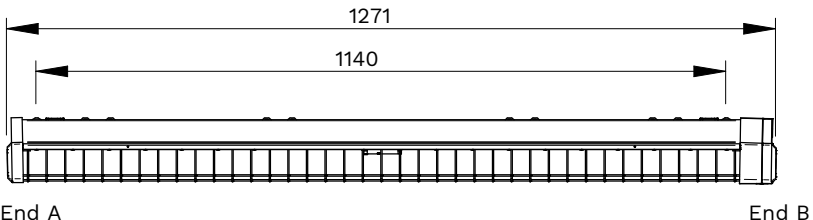

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
CT-BRO-ANZ-ECOARGONAUT-BA-001

