

PHILIPS

SmartBright



Trusted




Reliable



Great value

REAL
PROs
REAL
QUALITY

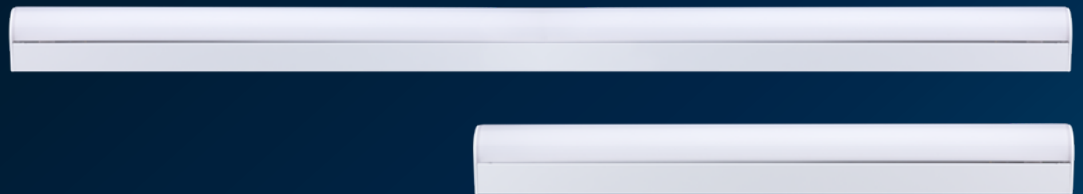

SmartBright batten

Real professionals choose **Philips SmartBright** for their everyday lighting installations.

Trusted performance, everyday.

The new tri-colour batten serves as an ideal replacement for 1x18W and 1x36W T8 battens.

Available in both 600mm and 1,200mm lengths, each product offers three colour temperature settings plus a dual power selection. Combine this configuration flexibility with a long service life and an exceptional warranty, and you have the obvious lighting choice for your indoor applications.


Features and benefits

- ✓ Available in 600mm and 1,200mm sizes
- ✓ Selectable dual power output to suit multiple application environments
- ✓ 3 selectable colour temperatures in each device
- ✓ Energy efficient with long service life.
- ✓ 5 year warranty

Applications

- ✓ All general purpose indoor lighting applications
- ✓ Residential, office and industrial buildings
- ✓ Parking garages, correctional facilities, schools, airports etc.

Product highlights



Dual
power

5
year
warranty


50,000
hours
L70

Product data


	BN125C LED SWT/SCCT L600 PSU AU	BN125C LED SWT/SCCT L1200 PSU AU
Power (selectable)	12/20W	20/40W
System lumens	1380/2000lm	2300/4000lm
System efficacy	100–115lm/W	
CCT (Selectable)	4000/5000/6500K	
CRI	> 80	
SDCM	4000K and 6500K: < 5; 5000K: < 6	
Beam angle	130°	
IP / IK rating	IP20/IK02	
Operating temperature	-20°C to +40°C	
Lifetime	50,000 hrs (L70)	
Input voltage	220–240V, 50/60Hz	
Power factor	> 0.9	
Electrical class	Class I	
Driver	Fixed Output	
Mounting type	Surface mount	
Housing colour	RAL9016 white	
Material	Housing: Metal Diffuser: Polycarbonate (PC)	
Dimensions	L 600mm x W 65mm x H 65mm	L 1135mm x W 65mm x H 65mm
Weight	0.85kg	1.45kg

Dimensions

600mm

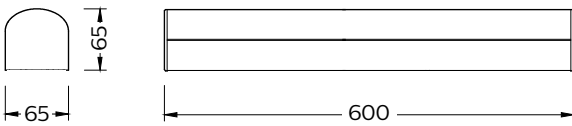

1,200mm

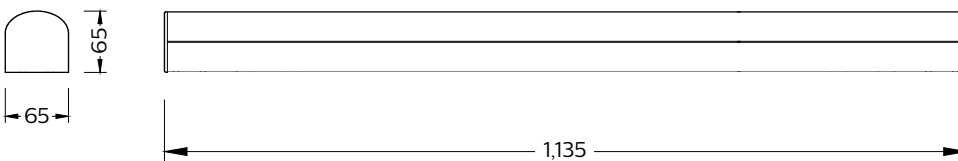

Order information

Order code	Barcode	Power (W)	Light Output (lm)	CCT (K)	Length (mm)
BN125CSWTL600P	8710163344362	12/20	1380/2000	4000/5000/6500	600
BN125CSWTL1200P	8710163344379	20/40	2300/4000	4000/5000/6500	1,200