
Datasheet

WP2 LED Weatherproof Batten IP65 - DALI Mains



CAT. NO. **685042**, **685072**

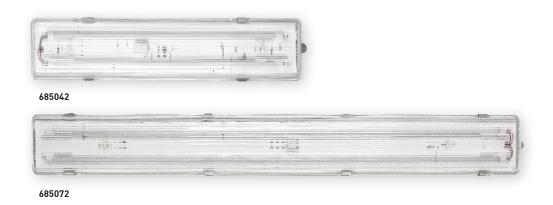

Cat. No.	685042	685072	
Description	WP2L6 LED BATTEN 4K DALI	WP2L12 LED BATTEN 4K DALI	
Length (mm)	671	1273	
Weight (kg)	2.7	4.8	
Light source	LED	LED (4000K)	
Luminaire Luminous flux (lm)	2200	3900	
Circuit Power (W)	28	42	
Luminaire efficiency (lm/W)	79	93	
Power factor		>0.9	
Inrush current	16.5A	28.5A	
Supply voltage	230 - 24	230 - 240V a.c 50Hz	
Ballast type	Dimma	Dimmable - DALI	
IP rating	1	IP65	
IK rating		IK09	
Retaining clips	316 Sta	316 Stainless Steel	
Body construction	Moulded glass rein	Moulded glass reinforced polyester (GRP)	
Diffuser	Clear reedec	Clear reeded polycarbonate	
Gasket	Sil	Silicone	
Geartray	High reflective white	High reflective white powder coated mild steel	
Compliance	AS/N	AS/NZS 60598	
Product Marking		⚠ DAL	

WP2 LED Weatherproof Batten IP65 - DALI Mains

CAT. NO. **685042**, **685072**




FEATURES

- A premium range of LED weatherproof battens.
- Available in 2 foot or 4 foot lengths.
- Two lumen packages: 2200lm or 3900lm, 4000K colour temperature.
- DALI dimmable for further energy saving.
- Ideal replacement for T5 equivalents.
- Dedicated LED engine for maximum spacings.
- LED Light source life: 50,000hrs, L80 B50 at ambient temperature of 25°C.
 - 50,000hrs, L70 B50 at ambient temperature of 40°C.
- CRI > 80
- 5 Year warranty.
- Designed and Manufactured in Australia.

DIMENSIONS





Legrand Australia 1300 369 777 www.legrand.com.au ABN 31 000 102 661

Legrand New Zealand 0800 476 009 www.legrand.co.nz Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.