



MASTER PL-S 2 Pin

MASTER PL-S 7W/840/2P 1CT/10

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base

Warnings and Safety

- \cdot Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information				
Cap-Base	G23 [G23]			
Life To 10% Failures (Nom)	0 h			
Life to 50% Failures (Nom)	10000 h			
LSF 2000 h Rated	99 %			
LSF 4000 h Rated	98 %			
LSF 6000 h Rated	95 %			
LSF 8000 h Rated	86 %			
Light technical				
Color Code	840 [CCT of 4000K]			
Luminous Flux (Nom)	400 lm			

Luminous Flux (Rated) (Nom)	405 lm	
Color Designation	Cool White (CW)	
Correlated Color Temperature (Nom)	4000 K	
Luminous Efficacy (rated) (Nom)	57 lm/W	
Color Rendering Index (Nom)	82	
LLMF 2000 h Rated	94 %	
LLMF 4000 h Rated	91 %	
LLMF 6000 h Rated	89 %	
LLMF 8000 h Rated	86 %	
Operating and electrical		
Power (Nom)	7 W	


Datasheet, 2022, January 14 data subject to change

MASTER PL-S 2 Pin

Lamp Current (Nom)	0.175 A	
Temperature		
Design Temperature (Nom)	28 °C	
Controls and dimming		
Dimmable	No	
Mechanical and housing		
Cap-Base Information	2 Pins	
Approval and application		
Mercury (Hg) Content (Nom)	1.4 mg	
Energy Consumption kWh/1000 h	9 kWh	

Product data	
Full product code	871869960696100
Order product name	MASTER PL-S 7W/840/2P 1CT/10
EAN/UPC - Product	8718699606961
Order code	927935684065
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927935684065
Net Weight (Piece)	26.000 g
ILCOS Code	FSD-7/40/1B-I-G23


Dimensional drawing



MASTER PL-S 7W/840/2P 1CT/10

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-S 7W/840/2P	28 mm	13 mm	97 mm	113 mm	135 mm
1CT/10					

Photometric data

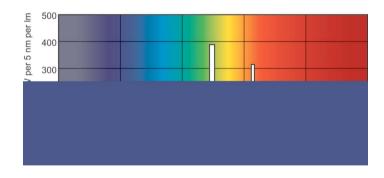


LDPB_PLS2PLM_840-Spectral power distribution B/W

LDPO_PLS2PLM_840-Spectral power distribution Colour

MASTER PL-S 2 Pin

Lifetime

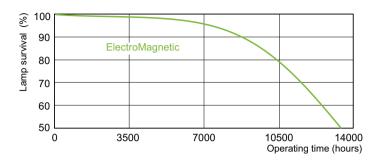



LDLE_PLS2PLM_0002-Life expectancy diagram

LDLE_PLS2PLM_0001-Life expectancy diagram



LDLM_PLS2PLM_0001-Lumen maintenance diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.