

# ROBUS®

## SURFACE FITTING

### VEGA GEN2 LED BULKHEAD CCT3 SELECTABLE

14W, IP65



RVE14CCT3P-04





RVE14CCT3-01

## PRODUCT INFORMATION DOCUMENT CONSTRUCTION

- Polycarbonate base, trim and diffuser
- HEX Stainless steel screws
- LiFePO<sub>4</sub> battery in emergency version

### FEATURES

- RVE14CCT3-01 Fitting Supplied Trimless:
  - Can be installed trimless
  - Plain and Eyelid trim accessories available in White & Black
- RVE14CCT3P-04 version complete with plain black trim, all other versions are sold without trims
- Slim profile with height of only 60mm
- High impact resistance body with IK10 rating ideal for sports centers, walkway areas
- AS2293.3 Emergency version Certified duration illumination in case of supply failure
- Complete with anti-tamper screws
- Double Insulated



	STANDARD RVE14CCT3P-04 c/w BLACK trim	STANDARD RVE14CCT3-01 TRIMLESS	EMERGENCY RVE14CCT3E-01 TRIMLESS
Comparable to:	32W T8	32W T8	32W T8
Total Power (W):	13.9/13.3/13.6	13.9/13.3/13.6	14.2/13.8/14.0
Total Light Output (lm):	1230/1340/1270	1230/1340/1270	1140/1250/1180
Total Emergency Light Output (lm):	N/A	N/A	160/160/160
Efficacy (lm/cctW):	89/101/94	89/101/94	80/90/84
Lux at 1m (lux):	420/460/430	420/460/430	390/420/400
Emergency Lux at 1m (lux):	N/A	N/A	50/50/50
Emergency Classification	N/A	N/A	C0/D20 : C90/D20
CCT (K):	3000/4000/6500	3000/4000/6500	3000/4000/6500
CRI:	80	80	80
IP:	65	65	65
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-10 ≤ Ta ≤ +40
Inrush Current:	1.24A/22ns	1.24A/22ns	1.24A/22ns
RG Value:	0	0	0
L70B50 or the variant:	>54,000	>54,000	>54,000
Dimensions ØxH:	285x60	285x60	285x60
Weight (kg):		0.82	0.97

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.



### ACCESSORIES:

RVETRIMP-01/ 04

Plain Trim White/ Black

RVETRIMEY-01/ 04

Eyelid Trim White/ Black

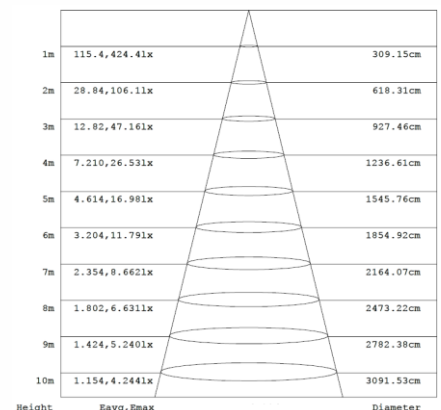

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Diagram for RVE14CCT3-01 in 3000K. Other diagrams available on request

IRE: TEL: +353 1 709 9000  
 UK: TEL: 0800 973 220  
 AUS: TEL: +61 7 3890 5444  
 NZ: TEL: +050 8 533 335

WEB: WWW.ROBUS.COM  
 WEB: WWW.ROBUS.COM  
 WEB: WWW.ROBUS.COM.AU  
 WEB: WWW.NZ\_PURCHASES@ROBUS.COM

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA