


# Product data sheet

## Characteristics

# SAU40084183

SAU Chassis, Acti9, 400A, 3Ph, 84 poles,  
18mm for iC60 MCB and RCBO, top or bottom  
feed

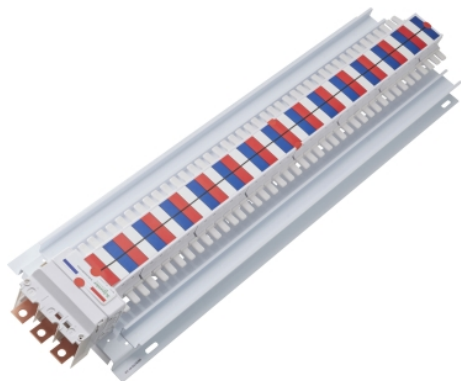

### Main

Range	Acti9
Product or component type	Chassis
Device application	Distribution

### Complementary

Incomer device	Switch disconnecter - 3P MCCB - 3P
Protection device type	Miniature circuit breaker (MCB) as outgoer Residual current circuit breaker with overcurrent protection (RCBO) as outgoer
Network type	AC
[In] rated current	400 A
Number of ways	1 way (incomer) - 3P 1 way (outgoer) - 1P or 3P
Rated voltage	415 V 50 Hz
Short-circuit withstand	25 kA 0.1 s
[Ui] rated insulation voltage	500 V
[Uimp] rated impulse withstand voltage	6 kV
Number of poles	84
Number of poles	84 x 18 mm
Width	245 mm
Length	950 mm
Depth	95 mm
Net weight	6.96 kg
Busbar pitch	18 mm
Location of connection	Top or bottom

### Environment

Standards	AS/NZS 61439
-----------	--------------

### Packing Units

Unit Type of Package 1	PCE
Package 1 Length	95 cm
Number of Units in Package 1	1
Package 1 Width	24.3 cm
Package 1 Height	9.5 cm
Package 1 Weight	5.956 kg

## Offer Sustainability

---

REACH Regulation

 [REACH Declaration](#)

---

EU RoHS Directive

Not applicable, out of EU RoHS legal scope

---