


Guardian Weatherproof Emergency Floodlight

The Guardian Weatherproof Emergency Floodlight is a versatile LED emergency light that meets AS/NZS 2293 standards. It is equipped with interchangeable narrow and wide beam lenses (60° and 110°), has an IP65 weatherproof design, and can be securely wall-mounted using a stainless steel bracket. With options for manual, DALI2, or Interact operation, this floodlight is well-suited for non-maintained emergency flood lighting applications.



- Versatile non-maintained LED emergency flood light compliant to AS/NZS2293
- Unique interchangeable adjustable narrow/wide beam lenses: 60° and 110° in box.
- IP65 weatherproof construction



70

CRI



IP65

Ingress Protection Rating



0 to 40

Operating Temperature



Non - Dimmable

Dimming



109,000hrs (L70/B50)

Lifetime



5 Years


Warranty

CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	INRUSH CURRENT	INRUSH CURRENT DURATION	LINE CURRENT
GDNWPEM	7.8W	892lm	135lm/W	6000K	L68.50 x W294 x H300 mm	6.6A	15.6µs	0.04A

BATTERY	BATTERY CHARGE	BATTERY VOLTAGE	BATTERY CAPACITY
LiFePO4	2hr	6.4V	3200mA

ACCESSORY CODE	DESCRIPTION
DGLCEM3200/2L12	Battery LiFePO4 2Cell 6.4V 3200mAh (2HR)

Line Drawings

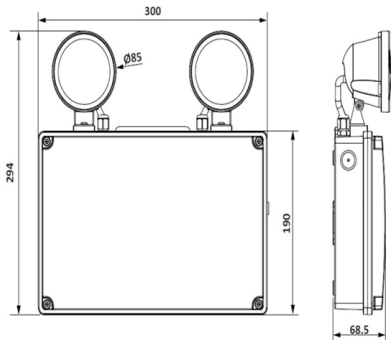



Interchangeable lens

