

## SPUR

### IP65 Temporary Lighting Weatherproof Batten

- Sealed, narrow body batten with 1.2m flex and plug - ideal for construction sites
- High-impact IP64 rated polycarbonate body and frosted diffuser, IK08 rated impact resistance
- Class I luminaire with 24W power
- EM and non-EM versions available with superior emergency performance



#### ORDERING INFORMATION

Order code	14719
Description	1200mm Temporary lighting Emergency Batten - 1.2m Flex and Plug
Item Code	EV-SPUR-IP65-1200-EM-F&P

#### MECHANICAL

IP Rating	IP65
IK Rating	IK08
Fitting Colour	Grey
Body Material	Polycarbonate
Installation Type	Surface mount

#### ELECTRICAL

Working Temp Range	220-240V °C
Input Frequency	50 Hz
Maximum Wattage	24 W

#### LAMP

Colour Rendering Index (CRI)	>80
CCT Configuration	Single

#### COLOUR TEMPERATURE

CCT Colour	Cool White
CCT	4000K

#### DRIVER

Flex & Plug or Lead Length	1200 mm
Flicker Free	Yes
PSTLM	1

Short Term Light Modulation (PstLM): The requirement is that PstLM should be less than or equal to 1.0. This metric measures the short-term flicker severity and ensures that flicker is not perceptible or is at a level that does not cause discomfort or health issues.

SVM	0.4
-----	-----

Stroboscopic Visibility Measure (SVM): The requirement for SVM is that it should be less than or equal to 0.4. The SVM metric assesses the visibility of the stroboscopic effect, which can make moving objects appear to be stationary or moving in discrete steps, thus ensuring that this effect is minimized in lighting environments to prevent visual discomfort and safety hazards.



## EMERGENCY (EM SUFFIX)

Emergency Mode	Maintained
Emergency Classification	C0:D80,C90:D63
Emergency Output Power	4700 mW
Emergency Duration	120 mins
Emergency Lumen Output	660 lm

## COMPLIANCE

Standards	AS/NZS 60598.1 AS 60598.2.22 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15 AS/NZS 2293.3
-----------	--

## WARRANTY

Commercial Use Warranty	5 RTB (Total 5 Years)
Warranty Operating Hours	15000 hrs


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

## DIMENSIONS

Product Height	58 mm
Product Length	1200 mm
Product Width	72 mm


## LINE DRAWINGS

### EV/SPUR/IP65/1200



## PHOTOMETRICS

### EV/SPUR/IP65/1200

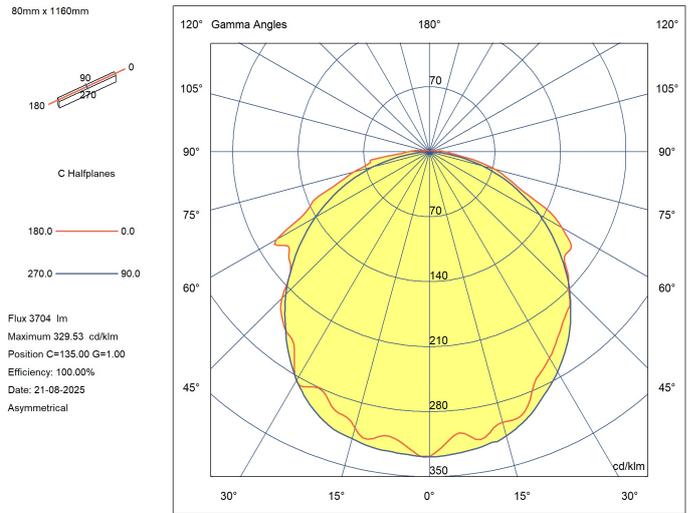

### EV/SPUR/IP65/1200/EM (Emergency)

